

**CITY OF VESTAVIA HILLS
DESIGN REVIEW BOARD
AGENDA
OCTOBER 4, 2018
6:00 P.M.**

Roll Call.

Approval of minutes – September 6, 2018

- (1) **D-0118-01** Regions Bank is requesting **Architectural Review and Final Review of Materials** for the property located at **529 Montgomery Hwy.** The purpose of this request is for renovation of an existing building. The property is owned by Regions Bank and is zoned Vestavia Hills B-2.
- (2) **D-0918-14** Fidel Castro is requesting **Final Review of Materials** for the property located at **2499 Rocky Ridge Rd.** The purpose of this request is for a new paint scheme. The property is owned by Fidel Castro and is zoned Vestavia Hills B-2.
- (3) **D-1018-16** Cahaba Capital Group is requesting **Architectural Review, Landscape Review, and Final Review of Materials** for the property located at **Healthy Way.** The purpose of this request is for a new building. The property is owned by Cahaba Capital Group and is zoned Vestavia Hills PUD-PB.
- (4) **D-1018-17** Ground Worx, LLC is requesting **Architectural Review, Landscape Review, and Final Review of Materials** for the property located at **1021 Montgomery Hwy.** The purpose of this request is a new building. The property is owned by Ground Worx, LLC and is zoned Vestavia Hills B-2.

Time of Adjournment.

CITY OF VESTAVIA HILLS

DESIGN REVIEW BOARD

MINUTES

SEPTEMBER 6, 2018

The Vestavia Hills Landscape and Architectural Control Board met in a regular session on this date at 6:00 PM. The roll was called with the following:

MEMBERS PRESENT: Robert Thompson, Chairman
Chris Pugh
Mae Coshatt
David Giddens
Jeff Slaton

MEMBERS ABSENT: Rip Weaver
Joe Ellis

OTHER OFFICIALS PRESENT: Conrad Garrison, City Planner

APPROVAL OF MINUTES

The minutes for August 2, 2018 were presented for approval.

MOTION Motion to dispense with the reading of the minutes for August 2, 2018 was made by Mrs. Coshatt and 2nd was by Mrs. Coshatt. Motion as carried on a voice vote as follows:

Mr. Pugh – yes	Mr. Slaton – yes
Mr. Giddens – yes	Mrs. Coshatt – yes
Mr. Thompson – yes	
Motion carries.	

Landscape Review

D-0918-12 Anthony F. Serra is requesting **Landscape Review** for the property located at **1476 Montgomery Hwy.** The purpose of this request is approval for a revised landscape plan. The property is owned by Anthony F. Serra and is zoned Vestavia Hills B-2.

Mr. Garrison described the background of the request.

David Eyrich was present to explain the plan.

The Board agreed with the application as presented.

MOTION Motion to approve Landscape Review for the property located at 1476 Montgomery Hwy. was made by Mrs. Coshatt. Second was made by Mr. Pugh. Voice vote as follows:

Mr. Pugh – yes	Mr. Slaton – yes
Mr. Giddens – yes	Mrs. Coshatt – yes
Mr. Thompson – yes	

Motion carries.

Final Review of Materials

D-0918-13 NewCo3, LLC is requesting **Final Review of Materials** for the property located at **1880 Montclair Ln., 1884 Montclair Ln., 1901 Laurel Rd.** The purpose of this request is for a new paint scheme. The property is owned by NewCo3, LLC and is zoned Vestavia Hills R-5.

Mr. Garrison described the background of the request.

Ed Mitchell and Josh Richards were present to explain the request.

The Board agreed with the changes.

MOTION Motion to approve Final Review of Materials for the property located at 1880 Montclair Ln., 1884 Montclair Ln., 1901 Laurel Rd. was made by Mrs. Coshatt. Second was made by Mr. Slaton. Voice vote as follows:

Mr. Pugh – yes	Mr. Slaton – yes
Mr. Giddens – yes	Mrs. Coshatt – yes
Mr. Thompson – yes	

Motion carries.

Final Review of Materials

D-0918-14 Fidel Castro is requesting **Final Review of Materials** for the property located at **2499 Rocky Ridge Rd.** The purpose of this request is for a new paint scheme. The property is owned by Fidel Castro and is zoned Vestavia Hills B-2.

Mr. Garrison described the background of the request.

Fidel Castro and Tryg Hott were present to explain the request.

The Board agreed with the plan with some changes.

MOTION Motion to approve Final Review of Materials for the property located at 2499 Rocky Ridge Rd. was made by Mr. Slaton with the following conditions: remove exterior parking lot walls and add wheel stops; no slope fascia; and bring back color samples to a subsequent meeting. Second was made by Mr. Pugh. Voice vote as follows:

Mr. Pugh – yes
Mr. Giddens – yes
Mr. Thompson – yes
Motion carries.

Mr. Slaton – yes
Mrs. Coshatt – yes

Tree Save Plan

D-0918-15 The City of Vestavia Hills is requesting approval of a **Tree Save Plan** for the property located at **1280 Montgomery Hwy.** The purpose of this request is remove/relocate protected trees. The property is owned by The City of Vestavia Hills and is zoned Vestavia Hills B-2.

Mr. Garrison described the background of the request.

Raynard Bowles was present to explain the request.

The Board agreed with the plan.

MOTION Motion to approve Tree Save Plan for the property located at 1280 Montgomery Hwy. was made by Mrs. Coshatt. Second was made by Mr. Pugh. Voice vote as follows:

Mr. Pugh – yes
Mr. Giddens – yes
Mr. Thompson – yes
Motion carries.

Mr. Slaton – yes
Mrs. Coshatt – yes

Conrad Garrison
City Planner

**CITY OF VESTAVIA HILLS
DESIGN REVIEW BOARD
APPLICATION**

I. APPLICANT INFORMATION:

Owner of Property (This Section Must Be Completed)

Name: Regions Bank, John Earley
Address: 250 Riverchase Parkway, Suite 600
Birmingham, AL 35244
Phone #: 205-560-5348 Other #: _____
E-Mail: john.earley@regions.com

Representing Attorney/Other Agent

Name: Jill Bryan, BDG Architects
Address: 2100 First Avenue North, Suite 100
Birmingham, AL 35203
Phone #: 205-252-8222 Other #: 205-910-3204
E-Mail: jill.bryan@bdgllp.com

II. DESCRIPTION OF PROPERTY:

LOCATION: 529 Montgomery Highway
Street Address

Subdivision name, Lot #, Block #, etc.

III. REASONS FOR REQUEST:

1. () Preliminary Review
2. () Landscape Review
3. (X) Architectural Review
5. () Final Review of Materials
6. () Other - Explain _____

IV. PROCESS:

1. () New Building
2. (X) Renovation of Existing Building
3. () New Landscape Plan
4. () Renovation to Existing Landscaping Plan
7. () Other - Explain _____

V. ZONING

Vestavia Hills Zoning for the subject property is Existing.


VI. OWNER AFFIDAVIT:

I do hereby declare the above statements are true and that I, the owner, and/or my duly appointed representative will be at the scheduled hearing.


Owner Signature/Date


Representing Agent (if any)/date

Given under my hand and seal
this 20th day of December, 2017.

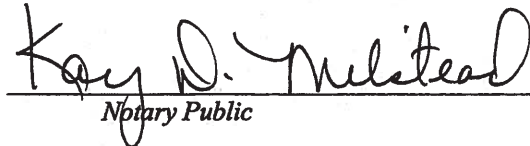
Notary Public

Kay D. Milstead
Notary Public
State of Alabama at Large
My Commission Expires 2/9/2020

My commission expires 9th
day of February, 2020.

Review Requirements

The following information and exhibits shall be provided and presented on your proposed project for review. The Board will review the three project components at the meeting. The Board must approve all three components before any permit is issued. A design professional, owner, or owner representative with knowledge of design elements and project provisions should represent the project to the committee.

- General: Provide fifteen copies plus one 8½" by 11" copy of all drawings or plans required below for review. Drawings must be to scale. These drawings should be turned in with the application.
1. Architectural Review
 - a. Site plan showing roadways, entrances, exits and parking.
 - b. Building elevations showing construction material, material colors, context, and protrusions. Color rendering is preferred. Roof design must be detailed.
 - c. Presentation by architect or owner with knowledge of compatibility with adjacent structures, city context, etc.
 2. Landscape Review
 - a. Site plan showing contours, drainage containment areas, parking spaces, sidewalks, buffers, site lighting and details, etc.
 - b. Landscape plan showing planting materials, designations, size, potted planting, window boxes, vines, etc. Trees will be identified by botanical name, quantity, and caliper. Shrubs will be identified by botanical name, quantity, and container size. Differentiate between existing and new landscaping.
 - c. Parking lots: Provide calculations of total square footage and square footage designated for landscaping. Indicate handicapped spaces. Indicate size of parking spaces.
 - d. Irrigation plan for all landscaped areas.
 - e. Statement of maintenance policy and provisions.

**CITY OF VESTAVIA HILLS
DESIGN REVIEW BOARD
APPLICATION**

I. APPLICANT INFORMATION:

Owner of Property (This Section Must Be Completed)

Name: FIDEL CASTRO

Address: 2499 ROCKY RIDGE RD

VESTAVIA HILLS, AL. 35216

Phone #: (205) 919-3324 Other #: _____

E-Mail: C.FIDEL1970 @ GMAIL.COM

Representing Attorney/Other Agent

Name: TRYG HOFF

Address: 1820 1ST AVE S.; SUITE C

IRONDALE, AL. 35210

Phone #: (205) 966-0956 Other #: _____

E-Mail: TRYGHOFF@BALSOUTH.NET

II. DESCRIPTION OF PROPERTY:

LOCATION: 2499 ROCKY RIDGE RD.

Street Address

ROCKY RIDGE ESTATES

Subdivision name, Lot #, Block #, etc.

III. REASONS FOR REQUEST:

1. () Preliminary Review
2. () Landscape Review
3. (X) Architectural Review
5. () Final Review of Materials
6. () Other - Explain _____

IV. PROCESS:

1. () New Building
2. (X) Renovation of Existing Building
3. () New Landscape Plan
4. () Renovation to Existing Landscaping Plan
7. () Other - Explain _____

V. ZONING

Vestavia Hills Zoning for the subject property is _____.

2018 AUG 22 P 3:40

VI. OWNER AFFIDAVIT:


I do hereby declare the above statements are true and that I, the owner, and/or my duly appointed representative will be at the scheduled hearing.

Fidel Castro
Owner Signature/Date

[Signature]
Representing Agent (if any)/date

Given under my hand and seal
this 22nd day of August, 20 18.

Dorothy L. Addison
Notary Public

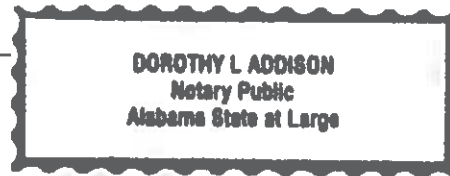

My commission expires 24th
day of March, 20 20.

Review Requirements

The following information and exhibits shall be provided and presented on your proposed project for review. The Board will review the three project components at the meeting. The Board must approve all three components before any permit is issued. A design professional, owner, or owner representative with knowledge of design elements and project provisions should represent the project to the committee.

- General: Provide fifteen copies plus one 8½" by 11" copy of all drawings or plans required below for review. Drawings must be to scale. These drawings should be turned in with the application.
1. Architectural Review
 - a. Site plan showing roadways, entrances, exits and parking.
 - b. Building elevations showing construction material, material colors, context, and protrusions. Color rendering is preferred. Roof design must be detailed.
 - c. Presentation by architect or owner with knowledge of compatibility with adjacent structures, city context, etc.
 2. Landscape Review
 - a. Site plan showing contours, drainage containment areas, parking spaces, sidewalks, buffers, site lighting and details, etc.
 - b. Landscape plan showing planting materials, designations, size, potted planting, window boxes, vines, etc. Trees will be identified by botanical name, quantity, and caliper. Shrubs will be identified by botanical name, quantity, and container size. Differentiate between existing and new landscaping.
 - c. Parking lots: Provide calculations of total square footage and square footage designated for landscaping. Indicate handicapped spaces. Indicate size of parking spaces.
 - d. Irrigation plan for all landscaped areas.
 - e. Statement of maintenance policy and provisions.

**CITY OF VESTAVIA HILLS
DESIGN REVIEW BOARD
APPLICATION**

I. APPLICANT INFORMATION:

Owner of Property (This Section Must Be Completed)

Name: Cahaba Capital Group, LLC
Address: 3112 Blue Lake Drive, Suite 120
Vestavia Hills, AL 35243
Phone #: 205-903-0732 Other #: _____
E-Mail: TBradford@CahabaGroup.com

Representing Attorney/Other Agent

Name: Jamie Collins / TURNERBATSON
Address: 1950 Stonegate Drive, Suite 200
Birmingham, AL 35242
Phone #: 205-278-6287 Other #: _____
E-Mail: jcollins@turnerbatson.com

II. DESCRIPTION OF PROPERTY:

LOCATION: Parcels 2,3,4 CF Patchwork Farms Retail Venture
Street Address
Lot (1) Patchwork Farms, Map Book 2212, Page 100
Subdivision name, Lot #, Block #, etc.

III. REASONS FOR REQUEST:

1. (✓) Preliminary Review
2. () Landscape Review
3. (✓) Architectural Review
5. () Final Review of Materials
6. () Other - Explain _____

IV. PROCESS:

1. (✓) New Building
2. () Renovation of Existing Building
3. () New Landscape Plan
4. () Renovation to Existing Landscaping Plan
7. () Other - Explain _____

V. ZONING

Vestavia Hills Zoning for the subject property is PB (Patchwork Farms PUD)

VI. OWNER AFFIDAVIT:

I do hereby declare the above statements are true and that I, the owner, and/or my duly appointed representative will be at the scheduled hearing.

Tyler Blum 9-19-18
Owner Signature/Date

WMA 9/19/18
Representing Agent (if any)/date

Given under my hand and seal
this 19th day of September, 2018.

Elizabeth A. Wilson
Notary Public


My commission expires 10/1/18
day of _____, 20 .

Review Requirements

The following information and exhibits shall be provided and presented on your proposed project for review. The Board will review the three project components at the meeting. The Board must approve all three components before any permit is issued. A design professional, owner, or owner representative with knowledge of design elements and project provisions should represent the project to the committee.

- General: Provide fifteen copies plus one 8½" by 11" copy of all drawings or plans required below for review. Drawings must be to scale. These drawings should be turned in with the application.
1. Architectural Review
 - a. Site plan showing roadways, entrances, exits and parking.
 - b. Building elevations showing construction material, material colors, context, and protrusions. Color rendering is preferred. Roof design must be detailed.
 - c. Presentation by architect or owner with knowledge of compatibility with adjacent structures, city context, etc.
 2. Landscape Review
 - a. Site plan showing contours, drainage containment areas, parking spaces, sidewalks, buffers, site lighting and details, etc.
 - b. Landscape plan showing planting materials, designations, size, potted planting, window boxes, vines, etc. Trees will be identified by botanical name, quantity, and caliper. Shrubs will be identified by botanical name, quantity, and container size. Differentiate between existing and new landscaping.
 - c. Parking lots: Provide calculations of total square footage and square footage designated for landscaping. Indicate handicapped spaces. Indicate size of parking spaces.
 - d. Irrigation plan for all landscaped areas.
 - e. Statement of maintenance policy and provisions.

COVENANT CLASSICAL SCHOOLS
PATCHWORK FARMS DEVELOPMENT
CITY OF VESTAVIA HILLS, AL

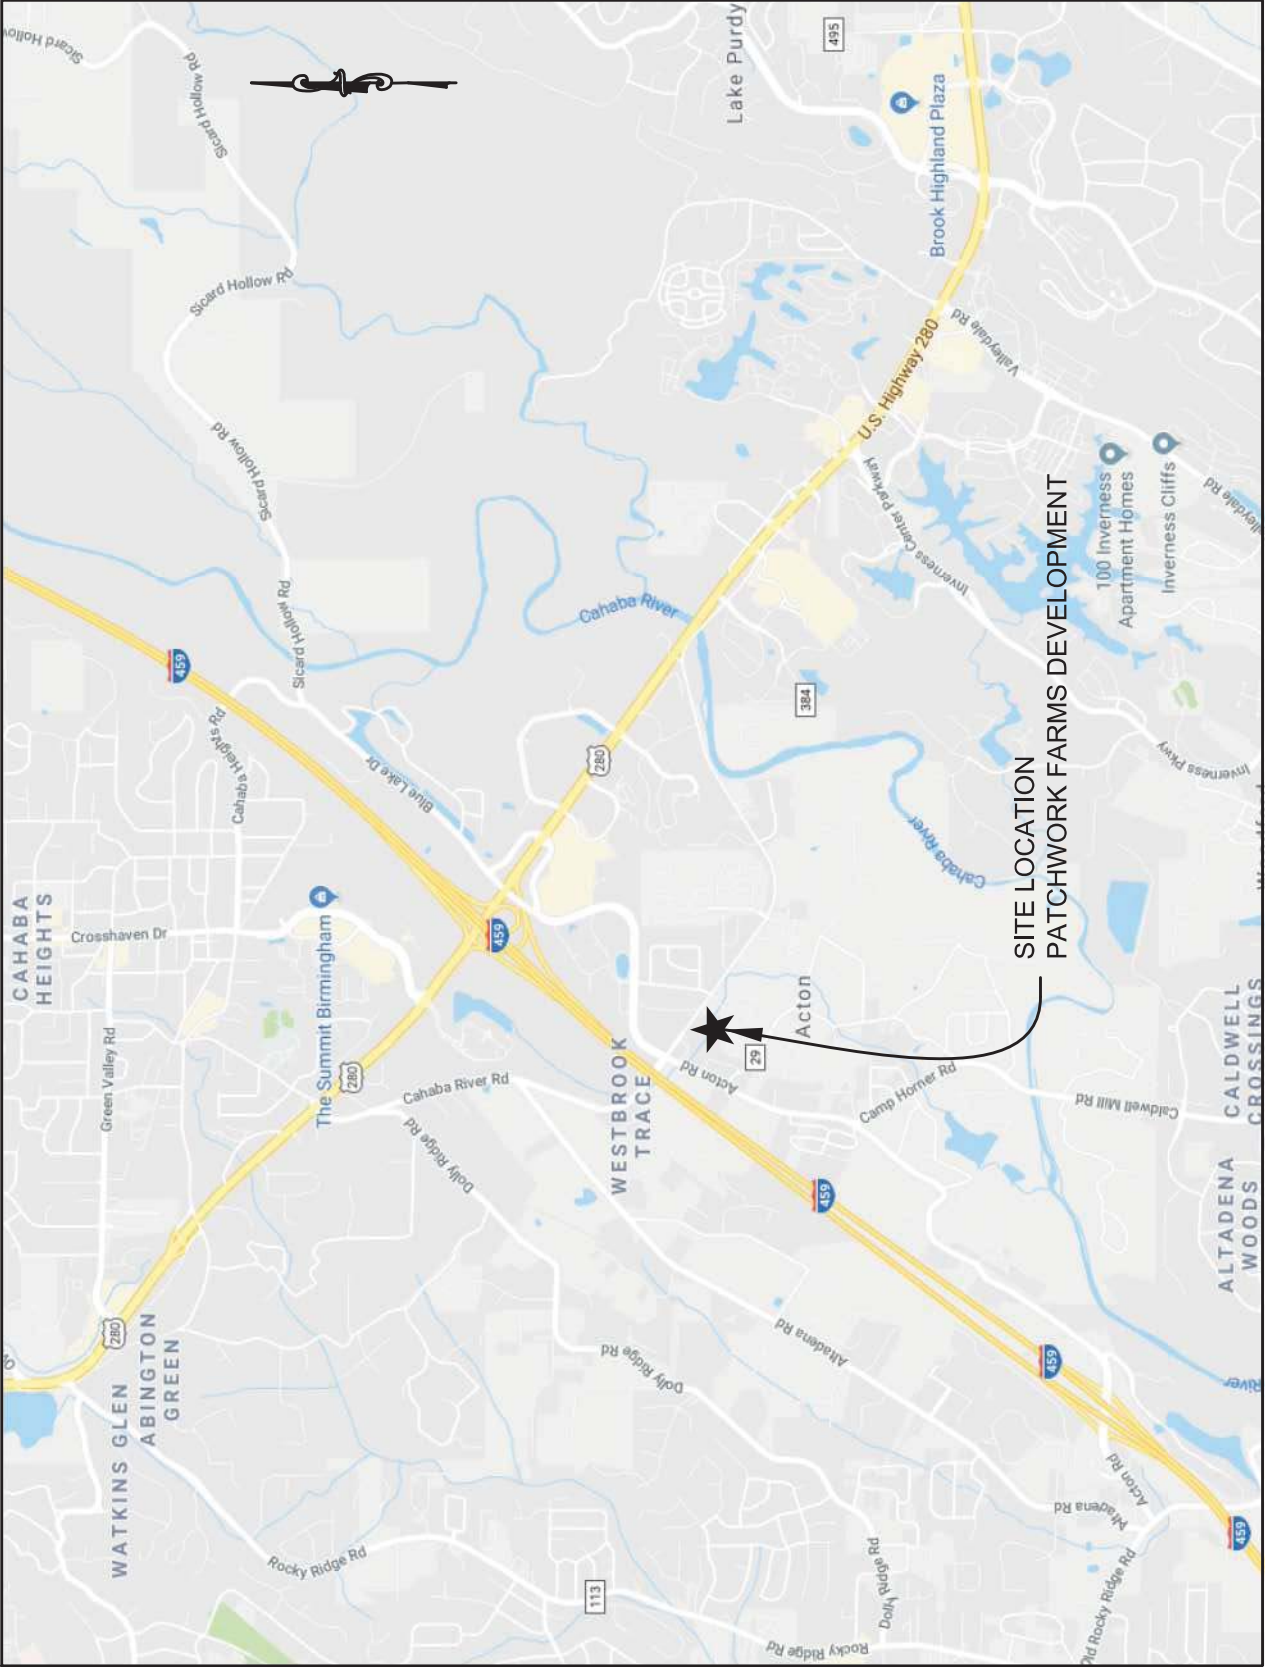


SITE LOCATION
PATCHWORK FARMS DEVELOPMENT

SITE VICINITY MAP
N.T.S.








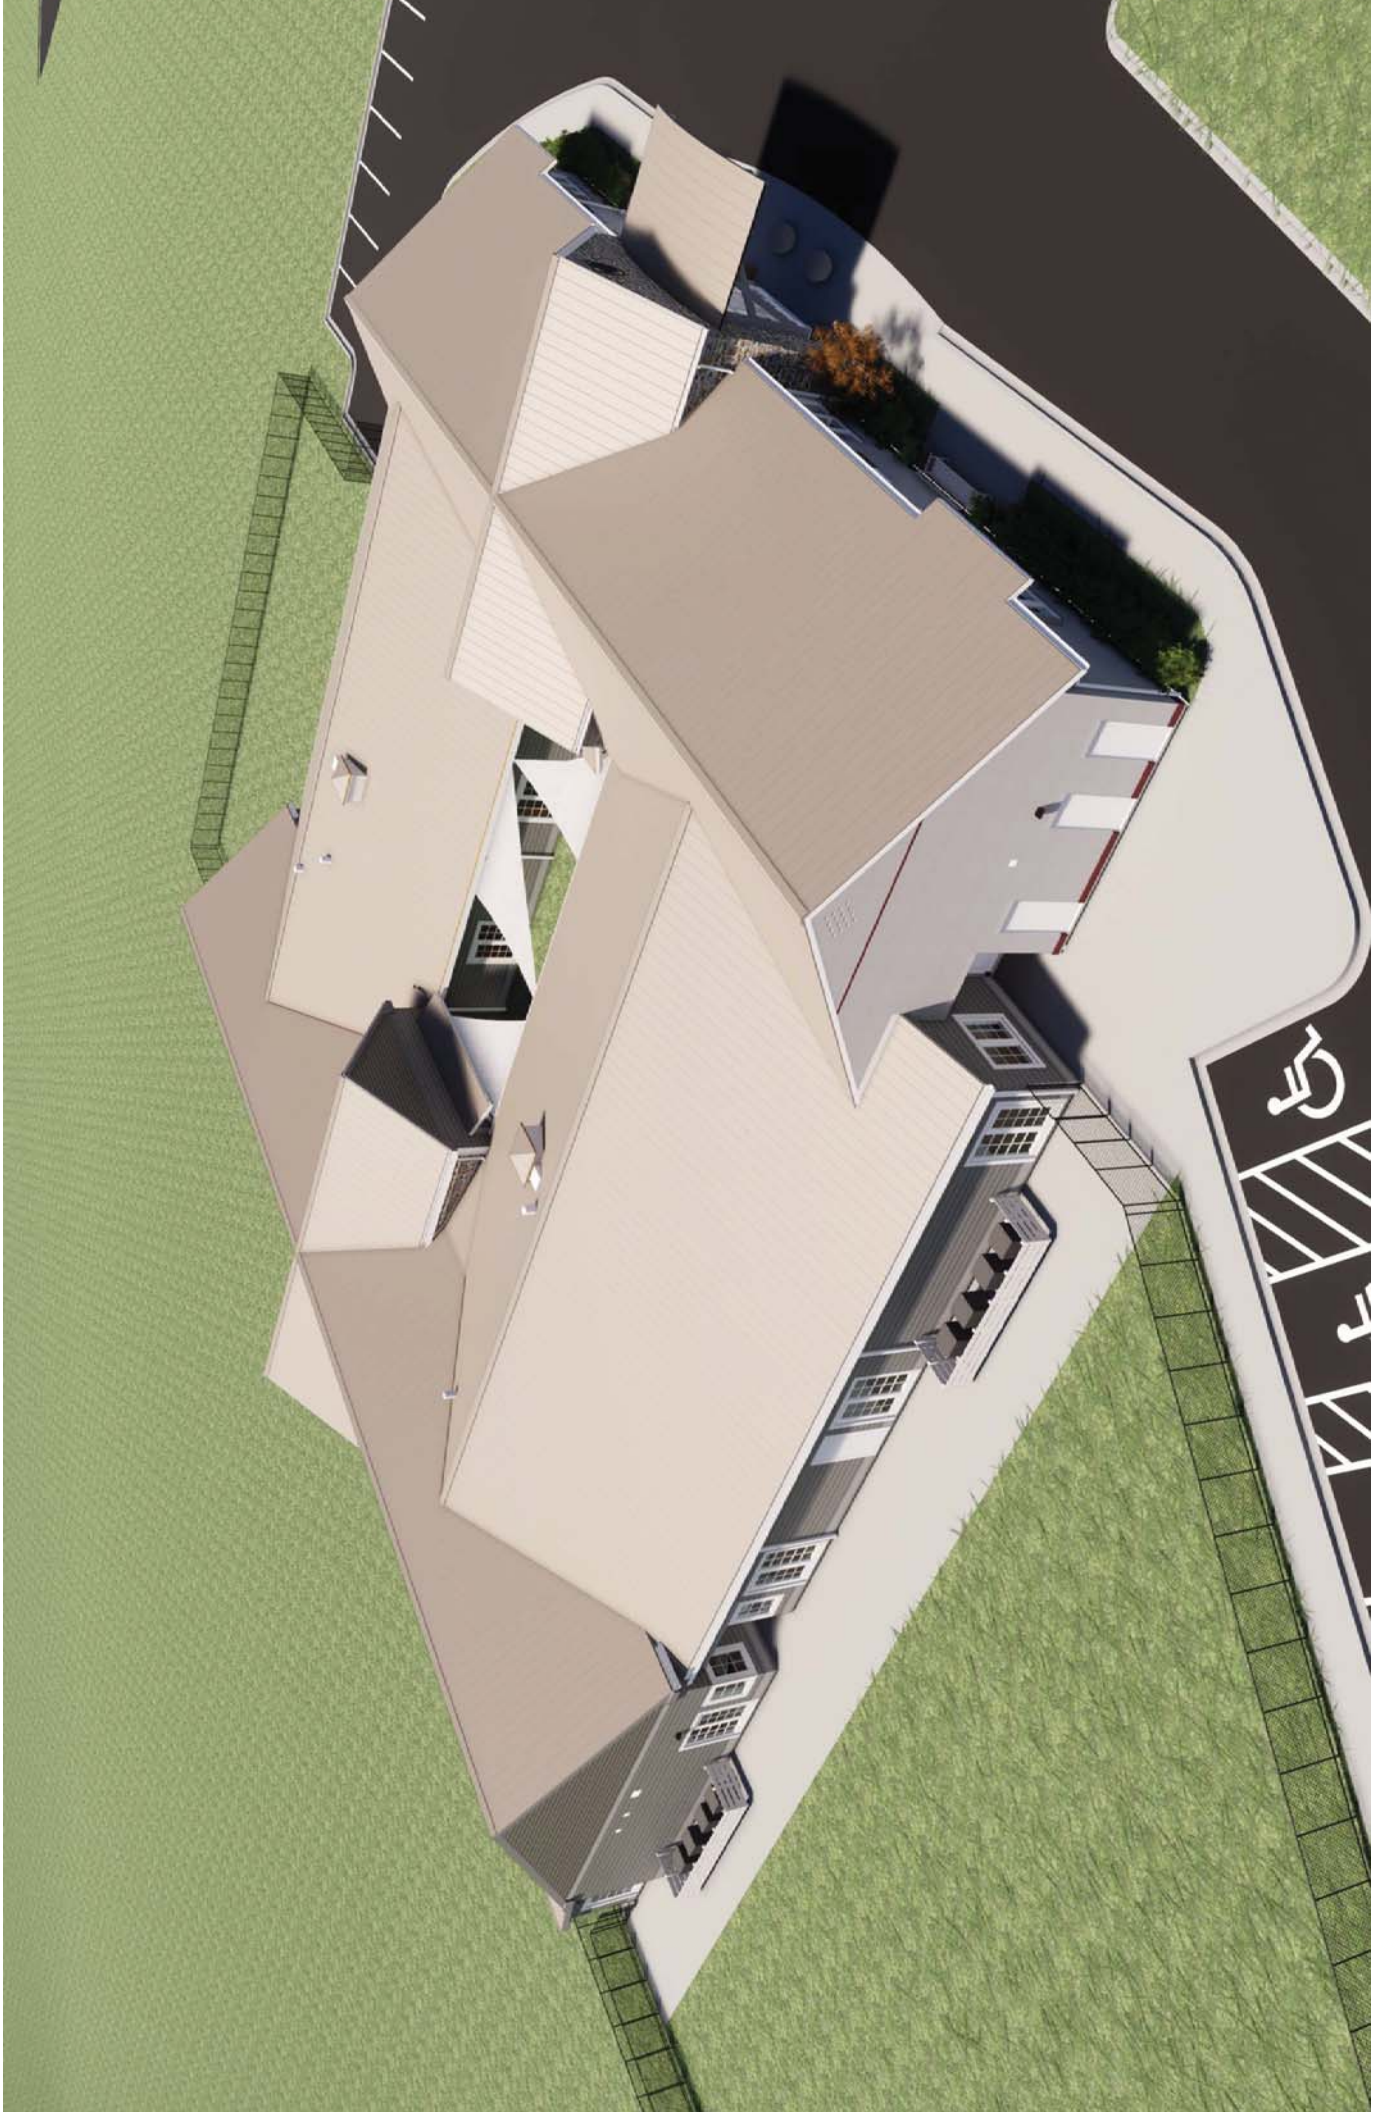



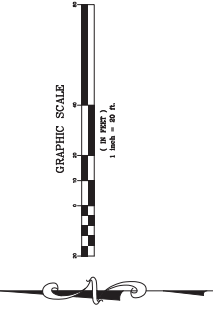


SITE DATA

ZONING:	R8 (PATCHWORK FARMS PAD)
TOTAL SITE AREA:	2.61 AC (108,388 SF)
PARKING REQUIRED:	88 SPACES PER BUILDING (200 SF SPACE PER CHILDREN 2-7)
PARKING PROVIDED:	88 INCLUDING 3 REQUIRED ADA SPACES
TOTAL IMPERVIOUS AREA:	66,898 SF (1.53 AC)
IMPERVIOUSNESS RATIO:	0.61
MAXIMUM BUILDING DENSITY:	86.47% MAX. 22,500 SF GFA PER ACRE
PROPOSED DENSITY BUILDING AREA:	22,800 SF GFA
REQUIRED PARKING AREA LANDSCAPING:	1.11% OF TOTAL PARKING AREA
PROPOSED PARKING LANDSCAPING:	2.04% OF TOTAL PARKING AREA

28-002-23-000-10.001
 CHARLES ANGLIN
 3180 DOLLY RIDGE DR
 DB 201608 PG 25/16

28-002-23-000-10.001
 ATTIC PLUS STORAGE
 3180 DOLLY RIDGE DR
 VESTAVIA AL 35243
 DB 8910 PG 8988

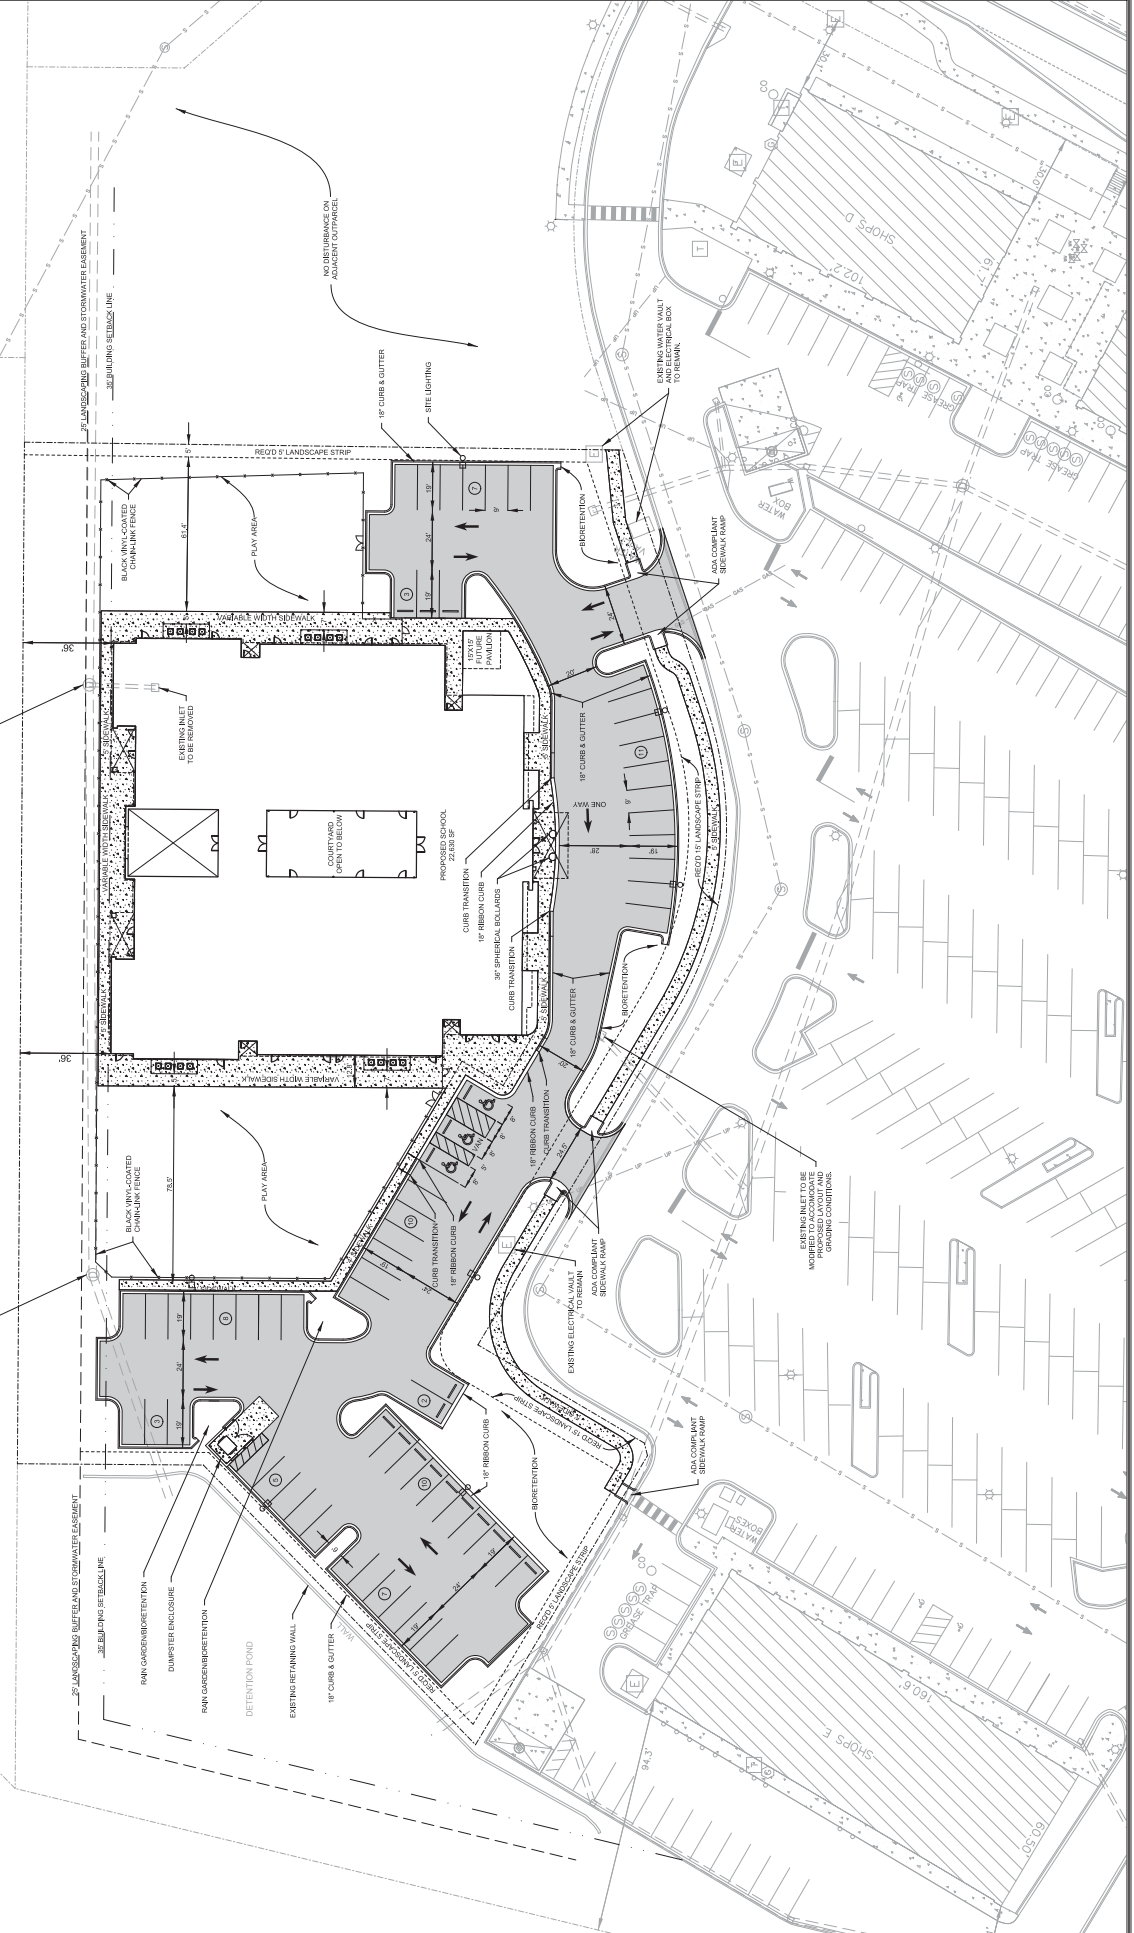



JACKSON
RENFRO
& ASSOCIATES, INC.
11500 WOODLAND PARKWAY, SUITE 100
HOUSTON, TEXAS 77036
PH: 281.767.8800
WWW.JRA-ARCHITECTS.COM

PRELIMINARY - NOT FOR CONSTRUCTION


COVENANT CLASSICAL SCHOOLS
PATCHWORK FARMS DEVELOPMENT
ESTAVIA HILLS, ALABAMA

PROJECT NO.	218168
DATE	10/11/2018
PROJECT	COVENANT CLASSICAL SCHOOLS
DATE	10/11/2018
PROJECT	COVENANT CLASSICAL SCHOOLS

NO.	DATE	DESCRIPTION
1	10/11/2018	ISSUED FOR PERMIT
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

PROJECT NO. 218168
DATE 10/11/2018
PROJECT COVENANT CLASSICAL SCHOOLS
DATE 10/11/2018
PROJECT COVENANT CLASSICAL SCHOOLS

© 2018 JACKSON RENFRO & ASSOCIATES, INC.

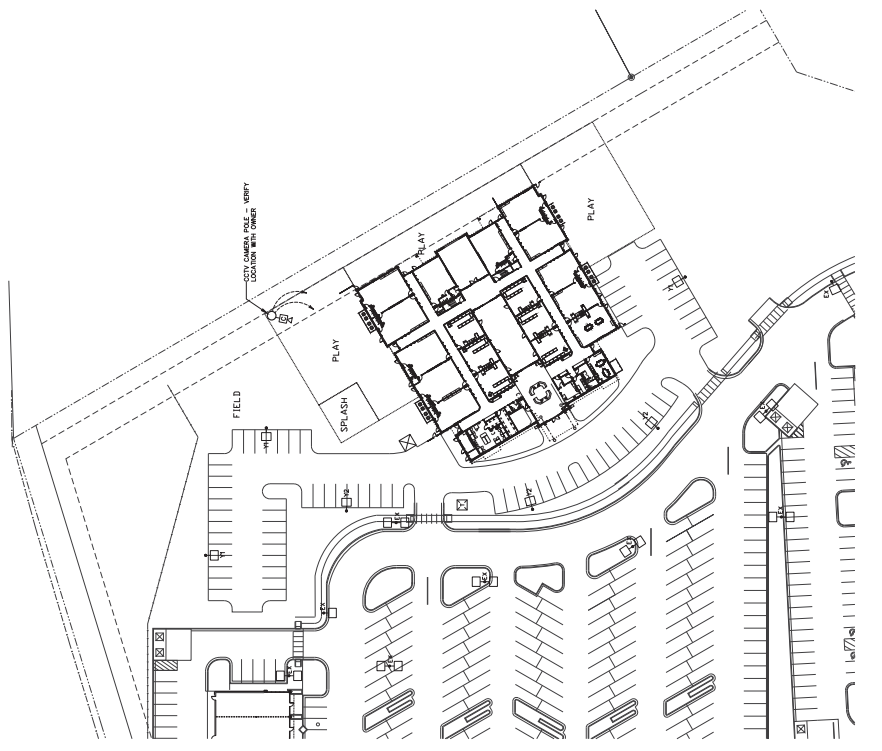

SITE ELECTRICAL PLAN
SCALE : 1" = 40'-0"

**CITY OF VESTAVIA HILLS
DESIGN REVIEW BOARD
APPLICATION**

I. APPLICANT INFORMATION:

Owner of Property (This Section Must Be Completed)

Name: Ground Worx, LLC

Address: 1021 U. S. Highway 31
Vestavia Hills, AL 35216

Phone #: (205) 824-6250 Other #: NA

E-Mail: (Larry Taylor) ltaylor@practicepartners.org

Representing Attorney/Other Agent

Name: Neil H. King, Jr.

Address: 1 Perimeter Park South, Suite 200S
Birmingham, AL 35243

Phone #: (205) 972-9100 Other #: NA

E-Mail: nking@evanterry.com

II. DESCRIPTION OF PROPERTY:

LOCATION: 1021 U. S. Highway 31, Vestavia Hills, Alabama
Street Address

Parcel 1.90 AC
Subdivision name, Lot #, Block #, etc.

III. REASONS FOR REQUEST:

1. Preliminary Review
2. Landscape Review
3. Architectural Review
5. Final Review of Materials
6. Other - Explain

IV. PROCESS:

1. New Building
2. Renovation of Existing Building
3. New Landscape Plan
4. Renovation to Existing Landscaping Plan
7. Other - Explain

V. ZONING

Vestavia Hills Zoning for the subject property is B-2.

VI. OWNER AFFIDAVIT:

I do hereby declare the above statements are true and that I, the owner, and/or my duly appointed representative will be at the scheduled hearing.

[Handwritten Signature]

Owner Signature/Date

Representing Agent (if any)/date

Given under my hand and seal
this 17th day of September 2018.

[Handwritten Signature: Cynthia Gayle Jones]
Notary Public



My commission expires 21st
day of June, 2020.

Review Requirements

The following information and exhibits shall be provided and presented on your proposed project for review. The Board will review the three project components at the meeting. The Board must approve all three components before any permit is issued. A design professional, owner, or owner representative with knowledge of design elements and project provisions should represent the project to the committee.

- General: Provide fifteen copies plus one 8½" by 11" copy of all drawings or plans required below for review. Drawings must be to scale. These drawings should be turned in with the application.
1. Architectural Review
 - a. Site plan showing roadways, entrances, exits and parking.
 - b. Building elevations showing construction material, material colors, context, and protrusions. Color rendering is preferred. Roof design must be detailed.
 - c. Presentation by architect or owner with knowledge of compatibility with adjacent structures, city context, etc.
 2. Landscape Review
 - a. Site plan showing contours, drainage containment areas, parking spaces, sidewalks, buffers, site lighting and details, etc.
 - b. Landscape plan showing planting materials, designations, size, potted planting, window boxes, vines, etc. Trees will be identified by botanical name, quantity, and caliper. Shrubs will be identified by botanical name, quantity, and container size. Differentiate between existing and new landscaping.
 - c. Parking lots: Provide calculations of total square footage and square footage designated for landscaping. Indicate handicapped spaces. Indicate size of parking spaces.
 - d. Irrigation plan for all landscaped areas.
 - e. Statement of maintenance policy and provisions.

Vicinity Map

Vestavia Medical Plaza
1021 U.S. Highway 31
Vestavia Hills, Alabama

Leona Way

Manor Dr

Old Orchard Rd

35266

1021 U.S. 31

Montgomery Hwy S

Mayland Ln

Forest View Ln

Current Site of
Vestavia Hills
City Hall

Medical Plaza Site
(Former Site of Party
Time)

Legend

- 1021 U.S. 31
- Alabama Eye Services
- Encore Performance Wear
- Feature 1
- Feature 2
- Feature 3
- Feature 4
- Feature 5
- Fulton Dental
- Hwy
- John Sasser Opticians
- Jones & Associates
- NATIONAL WILDLIFE REFUGE
- Red Lobster
- U-Haul Moving & Storage of Vestavia


Google Earth

© SPOT IMAGE
© 2018 Google
© 2018 Europa Technologies




500 ft





- 1 1/2" COMP. INSULATED CONCRETE PANEL (ICP) WALL, SEE DETAIL
- 2 CONCRETE BEAM/WALL, SEE TYPICAL BEAM/WALL DETAIL
- 3 STAIRS, SEE TYPICAL STAIR DETAIL
- 4 1/2" OUT. ASPHALT CONCRETE, SEE DETAIL
- 5 1/2" OUT. CONCRETE PAVEMENT, SEE DETAIL
- 6 ACCESSIBLE RAMP, SEE 5.000 AND 5.010, SEE DETAIL
- 7 1/2" POLYPROPYLENE FIBER REINFORCED CONCRETE (PPFRC) FOR DETAIL
- 8 WALKWAY DETAIL
- 9 1/2" POLYPROPYLENE FIBER REINFORCED CONCRETE (PPFRC) FOR DETAIL
- 10 CONCRETE FLOOR, SEE DETAIL
- 11 FINISH FLOOR, SEE DETAIL
- 12 CONCRETE FLOOR

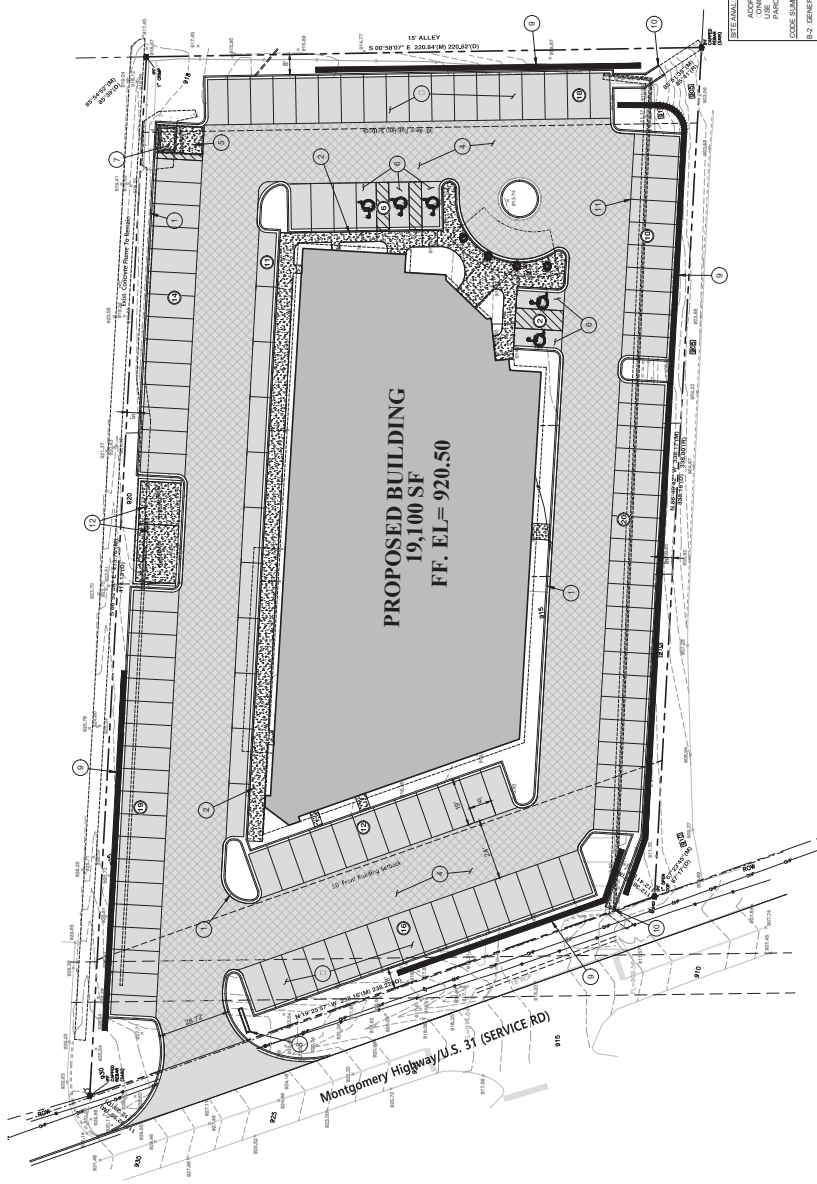

SITE ANALYSIS
 101 MONTGOMERY HWY, VESTAVIA HILLS, AL
 ADDRESS: 101 MONTGOMERY HWY, VESTAVIA HILLS, AL
 USE: MEDICAL FACILITY
 100 AC
CODE ZONING:
 100 GENERAL BUSINESS DISTRICT
PERMITTED USES:
 1. OFFICE BUILDING
 2. SERVICE STATION
 3. STORAGE
 4. WAREHOUSE
 5. WHOLESALE BUSINESS
PERMITTED ACCESSORIES:
 1. DRIVEWAY
 2. FENCE
 3. SIGN
 4. SIGNAGE
 5. SIGNAGE
 6. SIGNAGE
 7. SIGNAGE
 8. SIGNAGE
 9. SIGNAGE
 10. SIGNAGE
 11. SIGNAGE
 12. SIGNAGE
 13. SIGNAGE
 14. SIGNAGE
 15. SIGNAGE
 16. SIGNAGE
 17. SIGNAGE
 18. SIGNAGE
 19. SIGNAGE
 20. SIGNAGE
 21. SIGNAGE
 22. SIGNAGE
 23. SIGNAGE
 24. SIGNAGE
 25. SIGNAGE
 26. SIGNAGE
 27. SIGNAGE
 28. SIGNAGE
 29. SIGNAGE
 30. SIGNAGE
 31. SIGNAGE
 32. SIGNAGE
 33. SIGNAGE
 34. SIGNAGE
 35. SIGNAGE
 36. SIGNAGE
 37. SIGNAGE
 38. SIGNAGE
 39. SIGNAGE
 40. SIGNAGE
 41. SIGNAGE
 42. SIGNAGE
 43. SIGNAGE
 44. SIGNAGE
 45. SIGNAGE
 46. SIGNAGE
 47. SIGNAGE
 48. SIGNAGE
 49. SIGNAGE
 50. SIGNAGE
 51. SIGNAGE
 52. SIGNAGE
 53. SIGNAGE
 54. SIGNAGE
 55. SIGNAGE
 56. SIGNAGE
 57. SIGNAGE
 58. SIGNAGE
 59. SIGNAGE
 60. SIGNAGE
 61. SIGNAGE
 62. SIGNAGE
 63. SIGNAGE
 64. SIGNAGE
 65. SIGNAGE
 66. SIGNAGE
 67. SIGNAGE
 68. SIGNAGE
 69. SIGNAGE
 70. SIGNAGE
 71. SIGNAGE
 72. SIGNAGE
 73. SIGNAGE
 74. SIGNAGE
 75. SIGNAGE
 76. SIGNAGE
 77. SIGNAGE
 78. SIGNAGE
 79. SIGNAGE
 80. SIGNAGE
 81. SIGNAGE
 82. SIGNAGE
 83. SIGNAGE
 84. SIGNAGE
 85. SIGNAGE
 86. SIGNAGE
 87. SIGNAGE
 88. SIGNAGE
 89. SIGNAGE
 90. SIGNAGE
 91. SIGNAGE
 92. SIGNAGE
 93. SIGNAGE
 94. SIGNAGE
 95. SIGNAGE
 96. SIGNAGE
 97. SIGNAGE
 98. SIGNAGE
 99. SIGNAGE
 100. SIGNAGE















FEATURES & SPECIFICATIONS

INTENDED USE — Typical applications include corridors, lobbies, conference rooms and private offices.
CONSTRUCTION — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by torsion springs.

Vertically adjustable mounting brackets with commercial bar hangers provide 3-3/4" total adjustment. Two combination 1/2"-3/4" and four 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out). No. 12 AWG conductors, rated for 90°C.

Accommodates 12"-24" joist spacing.

Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.

Max ceiling thickness 1-1/2".

OPTICS — LEDs are binned to a 3-step SDCM; 80 CRI minimum.

LED light source concealed with diffusing optical lens.

General illumination lighting with 1.0 S/MH and 55° cutoff to source and source image.

Self-flanged anodized reflectors in specular, semi-specular, or matte diffuse finishes. Also available in white and black painted reflectors.

ELECTRICAL — Multi-volt (120-277V, 50/60Hz) 0-10V dimming drivers mounted to junction box, 10% or 1% minimum dimming level available.

0-10V dimming fixture requires two (2) additional low-voltage wires to be pulled.

70% lumen maintenance at 50,000 hours.

LISTINGS — Certified to US and Canadian safety standards. Damp location standard (wet location, covered ceiling optional). ENERGY STAR® certified product.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

LDN6

**6" OPEN and WALLWASH LED
Non-IC
New Construction Downlight**

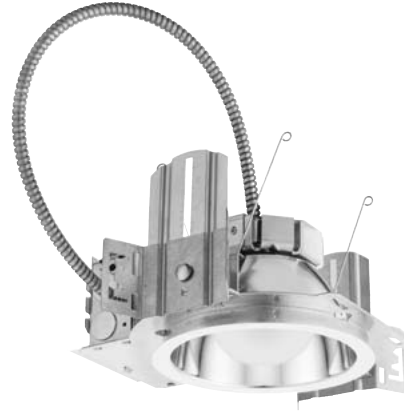

A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LDN6 35/15 L06AR LSS MVOLT EZ10

LDN6		Color temperature		Lumens ¹		Aperture/Trim Color		Finish	Voltage
Series	LDN6 6" round	27/ 2700K	30/ 3000K	05 500 lumens	25 2500 lumens	L06 Downlight	AR Clear	LSS Semi-specular	MVOLT Multi-volt
		35/ 3500K	40/ 4000K	10 1000 lumens	30 3000 lumens	LW6 Wallwash	WR ² White	LD Matte diffuse	120 120V
		50/ 5000K		15 1500 lumens	40 4000 lumens		BR ² Black	LS Specular	277 277V
				20 2000 lumens	50 5000 lumens				347 ³ 347V

Driver	Options
GZ10 0-10V driver dims to 10%	SF ⁴ Single fuse
GZ1 0-10V driver dims to 1%	TRW ⁵ White painted flange
EZ10 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 10%	TRBL ⁵ Black painted flange
	EL ⁶ Emergency battery pack with integral test switch
	ELR Emergency battery pack with remote test switch
	ELSD Emergency battery pack with self-diagnostics, integral test switch
	ELRSD Emergency battery pack with self-diagnostics, remote test switch
	E10WCP Emergency battery pack, 10W Constant Power, CA Title 20 compliant with integral test switch
EZ1 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 1%	E10WCPR Emergency battery pack, 10W Constant Power, CA Title 20 compliant with remote test switch
	NPP16D ⁷ nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1).
	NPP16DER ⁷ nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1). ER controls fixtures on emergency circuit.
	N80 ⁸ nLight™ Lumen Compensation
	NPS80EZ ⁷ nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1).
	NPS80EZER ⁷ nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1). ER controls fixtures on emergency circuit.
	HAO ¹¹ High ambient option
	CP ¹² Chicago Plenum
	WL Wet Location, specify for exterior use applications
	RRL___ RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature. Available only in RRLA, RRLB, RRLAE, and RRLC12S.
	NLTAIR2 ^{9, 10} nLight® Air enabled
	NLTAIRER2 ^{9, 10} nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit
	USPOM US point of manufacture

Accessories: Order as separate catalog number.	
EAC ISSM 375	Compact interruptible emergency AC power system
EAC ISSM 125	Compact interruptible emergency AC power system
GRA68 JZ	Oversized trim ring with 8" outside diameter ¹
SCA6	Sloped ceiling adapter. Refer to TECH-SCA for more options.


- Notes**
- Overall height varies based on lumen package; refer to dimensional chart on page 3.
 - Not available with finishes.
 - Not available with emergency options.
 - Must specify voltage 120V or 277V.
 - Available with clear (AR) reflector only.
 - Add "SD" for self-diagnostic option (i.e. ELSD)
 - Specify voltage. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
 - Fixture begins at 80% light level. Must be specified with NPS80EZ or NPS80EZER. Only available with EZ10 and EZ1 drivers.
 - Not available with CP, NPS80EZ, NPS80EZER, NPP16D, NPP16DER or N80 options.
 - NLTAIR2 and NLTAIRER2 not recommended for metal ceiling installations.
 - Fixture height is 6.5" for all lumen packages with HAO.
 - Must specify voltage for 3000lm. 5000lm with marked spacing 24 L x 24 W x 14 H.

LDN6


PHOTOMETRY

Distribution Curve Distribution Data Output Data Coefficient of Utilization Illuminance Data at 30" Above Floor for a Single Luminaire


LDN6 35/10 L06AR, input watts: 12.75, delivered lumens: 1082, LM/W = 84.86, spacing criterion at 0= 1.02, test no. ISF 30716P31.

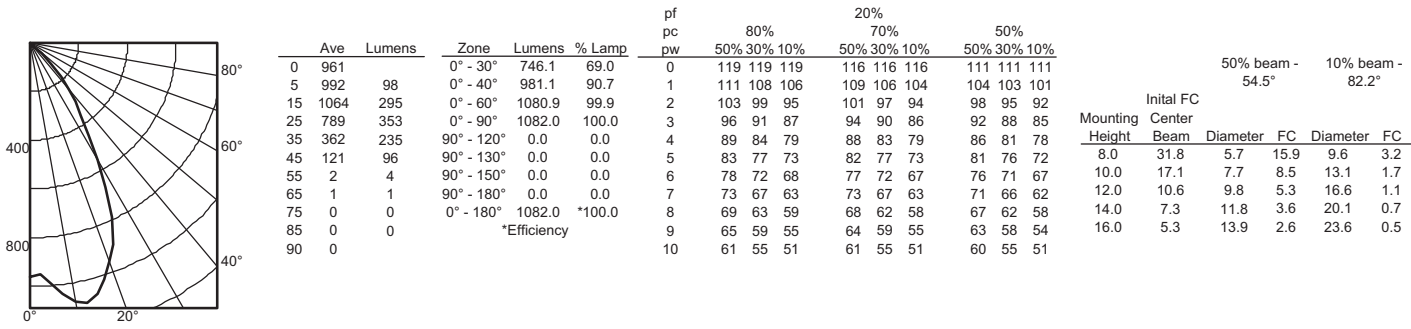

LDN6 35/30 L06AR, input watts: 34.69, delivered lumens: 3033.9, LM/W = 87.45, spacing criterion at 0= 1.02, test no. ISF 30716P22.

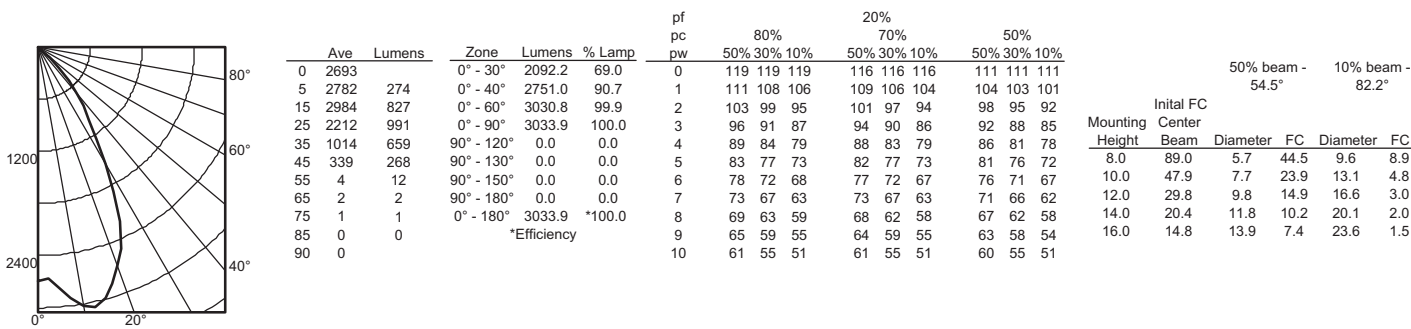


LDN6 35/50 L06AR, input watts: 55.56, delivered lumens: 4922.1, LM/W = 88.59, spacing criterion at 0= 1.02, test no. ISF 30716P40.

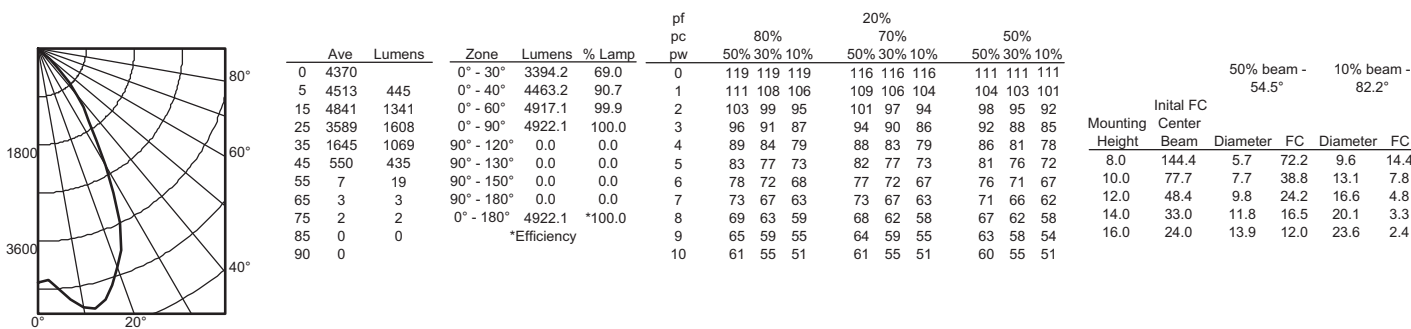

LDN6


*All dimensions are inches (centimeters) unless otherwise noted.

LDN6 1500 LUMEN

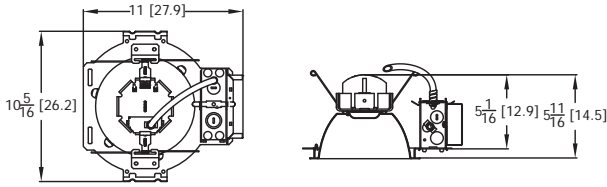


Aperture: 6-1/4 (15.9)
Ceiling Opening: 7-1/8 (18.1)
Overlap trim: 7-1/2 (19.1)

LDN6 3000 LUMEN

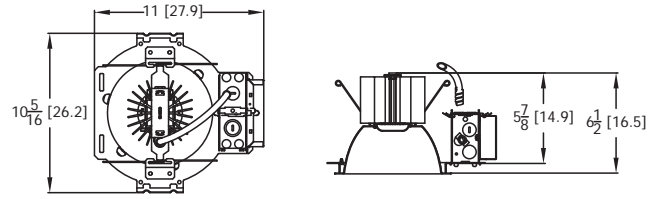


Aperture: 6-1/4 (15.9)
Ceiling Opening: 7-1/8 (18.1)
Overlap trim: 7-1/2 (19.1)

LDN6 5000 LUMEN

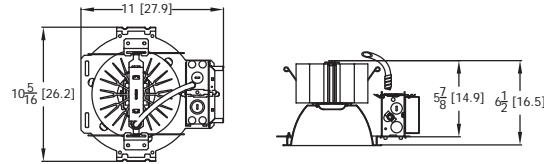


Marked Spacing: 24 x 24 x 10
Aperture: 6-1/4 (15.9)
Ceiling Opening: 7-1/8 (18.1)
Overlap trim: 7-1/2 (19.1)

LDN6 CP

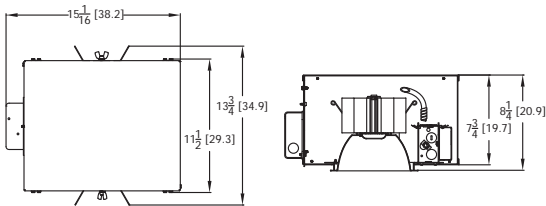

Marked Spacing above 3000 lumen: 24 x 24 x 10
Aperture: 6-1/4 (15.9)
Ceiling Opening: 7-1/8 (18.1)
Overlap trim: 7-1/2 (19.1)

LDN6 1500 EL-ELR

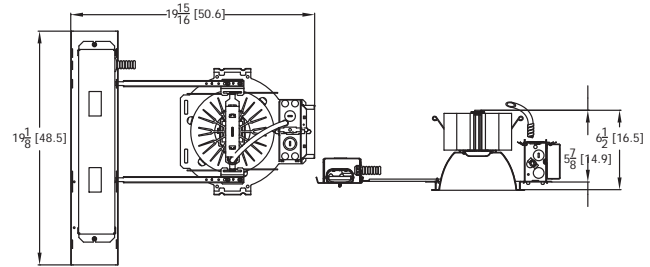

Marked Spacing above 3000 lumen: 24 x 24 x 10
Aperture: 6-1/4 (15.9)
Ceiling Opening: 7-1/8 (18.1)
Overlap trim: 7-1/2 (19.1)

LDN6			
Target Lumen	Lumens @ 3500K	Wattage	LPW
500	662.2	7.6	87.1
1000	1082.0	12.8	84.5
1500	1606.0	20.5	78.3
2000	2023.0	22.6	89.5
2500	2529.5	27.1	93.3
3000	3034.0	34.7	87.4
4000	3977.5	44.1	90.2
5000	4922.2	55.5	88.7

HOW TO ESTIMATE DELIVERED LUMENS IN EMERGENCY MODE

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

The LPW rating is also available at Designlight Consortium.

	LUMEN OUTPUT MULTIPLIERS - FINISH		
	Clear (AR)	White (WR)	Black (BR)
Specular (LS)	1.0	N/A	N/A
Semi-specular (LSS)	0.950	N/A	N/A
Matte diffuse (LD)	0.85	N/A	N/A
Painted	N/A	0.87	0.73

	LUMEN OUTPUT MULTIPLIERS - CCT				
	2700K	3000K	3500K	4000K	5000K
80CRI	0.950	0.966	1.000	1.025	1.101

Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- CRI: 80 typical.

ADDITIONAL DATA

COMPATIBLE 0-10V WALL-MOUNT DIMMERS		
MANUFACTURER	PART NO.	POWER BOOSTER AVAILABLE
Lutron®	Diva® DDTV	
	Diva® DVSCTV	
	Nova T® NTFTV	
	Nova® NFTV	
Leviton®	AWSMT-7DW	CN100
	AWSMG-7DW	PE300
	AMRMG-7DW	
	Leviton Centura Fluorescent Control System	
	IllumaTech® IP7 Series	
Synergy®	ISD BC	RDMFC
	SLD LPCS	
	Digital Equinox (DEQ BC)	
Douglas Lighting Controls	WPC-5721	
Entertainment Technology	Tap Glide TG600FAM120 (120V)	
	Tap Glide Heatsink TGH1500FAM120 (120V)	
	Oasis 0A2000FAMU	
Honeywell	EL7315A1019	EL7305A1010 (optional)
	EL7315A1009	
HUNT Dimming	Preset slide: PS-010-IV and PS-010-WH	
	Preset slide: PS-010-3W-IV and PS-010-3W-WH	
	Preset slide, controls FD-010: PS-IFC-010-IV and PS-IFC-010-WH-120/277V	
	Preset slide, controls FD-010: PS-IFC-010-3W-IV and PS-IFC-010-3W-WH-120/277V	
	Remote mounted unit: FD-010	
Lehigh Electronic Products	Solitaire	PBX
PDM Electrical Products	WPC-5721	
Starfield Controls	TR61 with DALI interface port	RT03 DALInet Router
WattStopper®	LS-4 used with LCD-101 and LCD-103	

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details


EXAMPLE

Group Fixture Control*

*Application diagram applies for fixtures with eldoLED drivers only.

- nPS 80 EZ** Dimming/Control Pack (qty: 2 required)
- nPODM 2P DX** Dual On/Off/Dim Push-Button WallPod
- nCM ADCX** Daylight Sensor with Automatic Dimming Control
- nCM PDT 9** Dual Technology Occupancy Sensor

Description: This design provides a dual on/off/dim wall station that enables manual control of the fixtures in Row A and Row B separately. Additionally, a daylight harvesting sensor is provided so the lights in Row B can be configured to dim automatically when daylight is available. An occupancy sensor turns off all lights when the space is vacant.

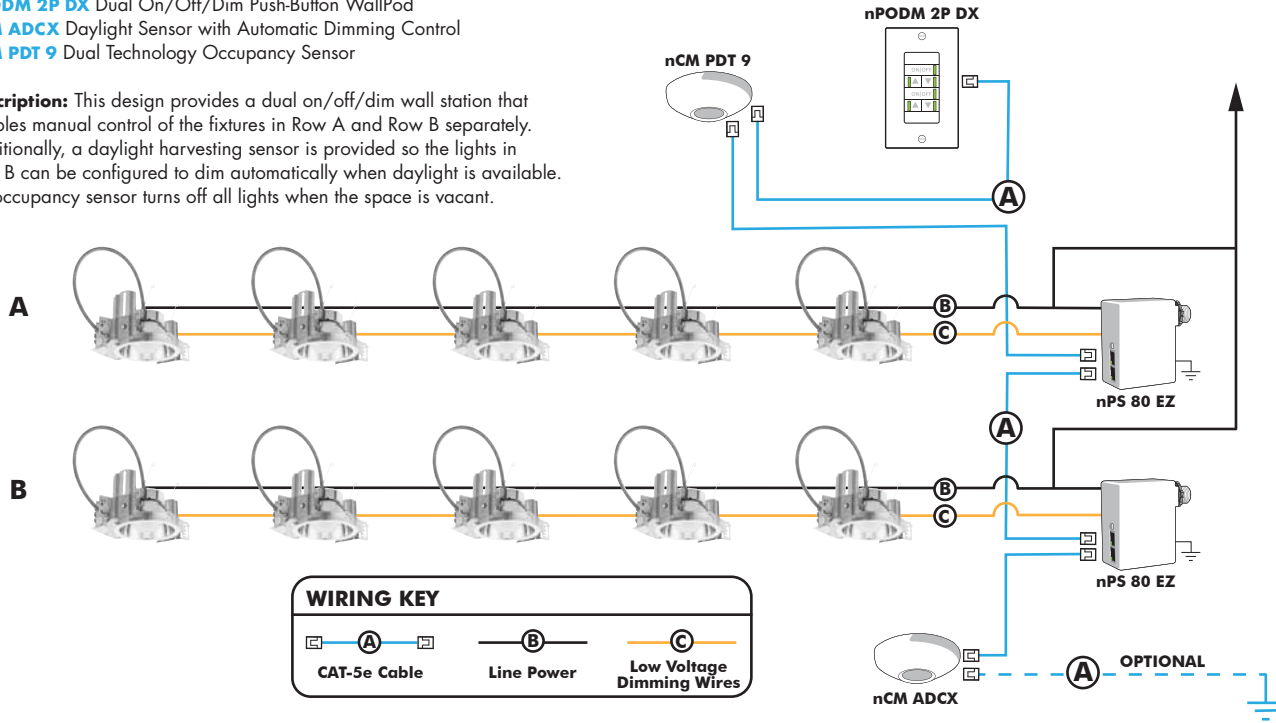

Choose Wall Controls

nLight offers multiple styles of wall controls - each with varying features and user experience.



Push-Button Wallpod
Traditional tactile buttons and LED user feedback



Graphic Wallpod
Full color touch screen provides a sophisticated look and feel

nLight® Wired Controls Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight for complete listing of nLight controls.

WallPod Stations	Model number	Occupancy sensors	Model Number
On/Off	nPODM (Color)	Small motion 360°, ceiling (PIR/dual Tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPOD DX (Color)	Large motion 360°, ceiling (PIR/dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX (Color)	Wide View (PIR/dual tech)	nWV 16 / nWV PDT 16
Photocell controls	Model Number	Wall Switch w/ Raise/Lower (PIR/dual tech)	nWSX LV DX / nWSX PDT LV DX
Dimming	nCM ADCX	Cat-5 cables (plenum rated)	Model Number
		10', CAT5 10FT	CATS 10FT J1
		15, CAT5 15FT	CATS 15FT J1

nLight® AIR Control Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair.

Wall switches

	Model number
On/Off single pole	rPODB [color]
On/Off two pole	rPODB 2P [color]
On/Off & raise/lower single pole	rPODB DX [color]
On/Off & raise/lower two pole	rPODB 2P DX [color]
On/Off & raise/lower single pole	rPODBZ DX WH ¹

Notes

- 1 Can only be ordered with the RES7Z zone control sensor version.

nLight AIR

nLight AIR is the ideal solution for retrofit or new construction spaces where adding communication is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each Indy L-Series Luminaire. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.



Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome





D-Series Size 1 LED Wall Luminaire



Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

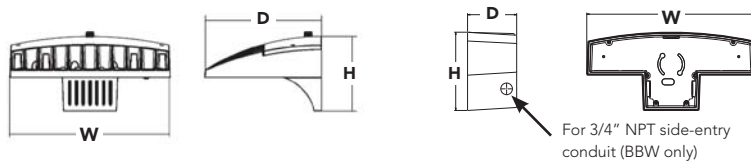

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBTDX

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines)	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse	MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 ² 480 ²	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ³	Shipped installed PE Photoelectric cell, button type ⁴ DMG 0-10V dimming driver (no controls) PIR 180° motion/ambient light sensor, <15' mtg ht ⁵ PIRH 180° motion/ambient light sensor, 15-30' mtg ht ⁵ PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ² PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ² ELCW Emergency battery backup (includes external component enclosure) ⁶

Other Options

Finish (required)

Shipped installed

SF	Single fuse (120, 277 or 347V) ⁷
DF	Double fuse (208, 240 or 480V) ⁷
HS	House-side shield ⁸
SPD	Separate surge protection ⁹

Shipped separately⁸

BSW	Bird-deterrent spikes
WG	Wire guard
VG	Vandal guard
DDL	Diffused drop lens

DDBXD	Dark bronze	DSSXD	Sandstone	DWHGXD	Textured white
DBLXD	Black	DBTDX	Textured dark bronze	DSSTXD	Textured sandstone
DNAXD	Natural aluminum	DBLBXD	Textured black		
DWHXD	White	DNATXD	Textured natural aluminum		

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR and PIR1FC3V specifies the **Sensor Switch SBGR-10-ODP** control; PIRH specifies the **Sensor Switch SBGR-6-ODP** control; see **Motion Sensor Guide** for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with 20 LED/1000 mA configuration (DSXW1 LED 20C 1000).
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option. Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- See the electrical section on page 3 for more details.

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
(10 LEDs)	350mA	14W	T2S	1,415	0	0	1	101	1,520	0	0	1	109	1,529	0	0	1	109	894	0	0	1	64
			T2M	1,349	0	0	1	96	1,449	0	0	1	104	1,458	0	0	1	104	852	0	0	1	61
			T3S	1,400	0	0	1	100	1,503	0	0	1	107	1,512	0	0	1	108	884	0	0	1	63
			T3M	1,386	0	0	1	99	1,488	0	0	1	106	1,497	0	0	1	107	876	0	0	1	63
			T4M	1,358	0	0	1	97	1,458	0	0	1	104	1,467	0	0	1	105	858	0	0	1	61
			TFTM	1,411	0	0	1	101	1,515	0	0	1	108	1,525	0	0	1	109	892	0	0	1	64
	ASDF	1,262	0	0	1	90	1,355	1	0	1	97	1,363	1	0	1	97	797	0	0	1	57		
	530 mA	20W	T2S	2,054	1	0	1	103	2,205	1	0	1	110	2,219	1	0	1	111	1,264	0	0	1	63
			T2M	1,957	1	0	1	98	2,102	1	0	1	105	2,115	1	0	1	106	1,205	0	0	1	60
			T3S	2,031	0	0	1	102	2,181	0	0	1	109	2,195	0	0	1	110	1,250	0	0	1	63
			T3M	2,010	1	0	1	101	2,159	1	0	1	108	2,172	1	0	1	109	1,237	0	0	1	62
			T4M	1,970	1	0	1	99	2,115	1	0	1	106	2,128	0	0	1	106	1,212	0	0	1	61
			TFTM	2,047	0	0	1	102	2,198	0	0	1	110	2,212	0	0	1	111	1,260	0	0	1	63
	ASDF	1,830	1	0	1	92	1,966	1	0	1	98	1,978	1	0	1	99	1,127	0	0	1	56		
	700 mA	27W	T2S	2,623	1	0	1	97	2,816	1	0	1	104	2,834	1	0	1	105	1,544	0	0	1	57
			T2M	2,499	1	0	1	93	2,684	1	0	1	99	2,701	1	0	1	100	1,472	0	0	1	55
			T3S	2,593	1	0	1	96	2,785	1	0	1	103	2,802	1	0	1	104	1,527	0	0	1	57
			T3M	2,567	1	0	1	95	2,757	1	0	1	102	2,774	1	0	1	103	1,512	0	0	1	56
			T4M	2,515	1	0	1	93	2,701	1	0	1	100	2,718	1	0	1	101	1,481	0	0	1	55
			TFTM	2,614	1	0	1	97	2,807	1	0	1	104	2,825	1	0	1	105	1,539	0	0	1	57
	ASDF	2,337	1	0	1	87	2,510	1	0	1	93	2,526	1	0	1	94	1,376	0	0	1	51		
	1000 mA	40W	T2S	3,685	1	0	1	92	3,957	1	0	1	99	3,982	1	0	1	100	2,235	1	0	1	58
			T2M	3,512	1	0	1	88	3,771	1	0	1	94	3,795	1	0	1	95	2,130	1	0	2	55
			T3S	3,644	1	0	1	91	3,913	1	0	1	98	3,938	1	0	1	98	2,210	1	0	2	57
T3M			3,607	1	0	1	90	3,874	1	0	1	97	3,898	1	0	1	97	2,187	1	0	2	56	
T4M			3,534	1	0	1	88	3,795	1	0	1	95	3,819	1	0	1	95	2,143	1	0	2	55	
TFTM			3,674	1	0	1	92	3,945	1	0	1	99	3,969	1	0	1	99	2,228	1	0	2	57	
ASDF	3,284	1	0	1	82	3,527	1	0	1	88	3,549	1	0	1	89	1,991	1	0	2	51			
(20 LEDs)	350mA	24W	T2S	2,820	1	0	1	118	3,028	1	0	1	126	3,047	1	0	1	127	1,777	1	0	1	74
			T2M	2,688	1	0	1	112	2,886	1	0	1	120	2,904	1	0	1	121	1,693	1	0	1	71
			T3S	2,789	1	0	1	116	2,995	1	0	2	125	3,013	1	0	2	126	1,757	0	0	1	73
			T3M	2,761	1	0	1	115	2,964	1	0	2	124	2,983	1	0	2	124	1,739	1	0	1	72
			T4M	2,705	1	0	1	113	2,904	1	0	2	121	2,922	1	0	2	122	1,704	1	0	1	71
			TFTM	2,811	1	0	1	117	3,019	1	0	2	126	3,038	1	0	2	127	1,771	0	0	1	74
	ASDF	2,513	1	0	1	105	2,699	1	0	2	112	2,716	1	0	2	113	1,584	1	0	1	66		
	530 mA	36W	T2S	4,079	1	0	1	113	4,380	1	0	1	122	4,408	1	0	1	122	2,504	1	0	1	70
			T2M	3,887	1	0	1	108	4,174	1	0	1	116	4,200	1	0	1	117	2,387	1	0	1	66
			T3S	4,034	1	0	1	112	4,332	1	0	1	120	4,359	1	0	1	121	2,477	1	0	1	69
			T3M	3,993	1	0	1	111	4,288	1	0	1	119	4,315	1	0	1	120	2,451	1	0	2	68
			T4M	3,912	1	0	2	109	4,201	1	0	2	117	4,227	1	0	1	117	2,402	1	0	1	67
			TFTM	4,066	1	0	1	113	4,367	1	0	1	121	4,394	1	0	1	122	2,496	1	0	1	69
	ASDF	3,635	1	0	2	101	3,904	1	0	2	108	3,928	1	0	2	109	2,232	1	0	1	62		
	700 mA	47W	T2S	5,188	1	0	1	110	5,571	1	0	1	119	5,606	1	0	1	119	3,065	1	0	1	65
			T2M	4,945	1	0	1	105	5,310	1	0	1	113	5,343	1	0	1	114	2,921	1	0	1	62
			T3S	5,131	1	0	1	109	5,510	1	0	2	117	5,544	1	0	2	118	3,031	1	0	1	64
			T3M	5,079	1	0	2	108	5,454	1	0	2	116	5,488	1	0	2	117	3,000	1	0	1	64
			T4M	4,976	1	0	2	106	5,343	1	0	2	114	5,377	1	0	2	114	2,939	1	0	1	63
			TFTM	5,172	1	0	2	110	5,554	1	0	2	118	5,589	1	0	2	119	3,055	1	0	1	65
	ASDF	4,624	1	0	2	98	4,966	1	0	2	106	4,997	1	0	2	106	2,732	1	0	1	58		
	1000 mA	74W	T2S	7,205	1	0	1	97	7,736	1	0	1	105	7,785	1	0	1	105	4,429	1	0	1	61
			T2M	6,866	1	0	2	93	7,373	1	0	2	100	7,419	1	0	2	100	4,221	1	0	2	58
			T3S	7,124	1	0	2	96	7,650	1	0	2	103	7,698	1	0	2	104	4,380	1	0	2	60
T3M			7,052	1	0	2	95	7,736	1	0	2	105	7,620	1	0	2	103	4,335	1	0	2	59	
T4M			6,910	1	0	2	93	7,420	1	0	2	100	7,466	1	0	2	101	4,248	1	0	2	58	
TFTM			7,182	1	0	2	97	7,712	1	0	2	104	7,760	1	0	2	105	4,415	1	0	2	60	
ASDF	6,421	1	0	2	87	6,895	2	0	2	93	6,938	2	0	2	94	3,947	1	0	2	54			

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88


Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

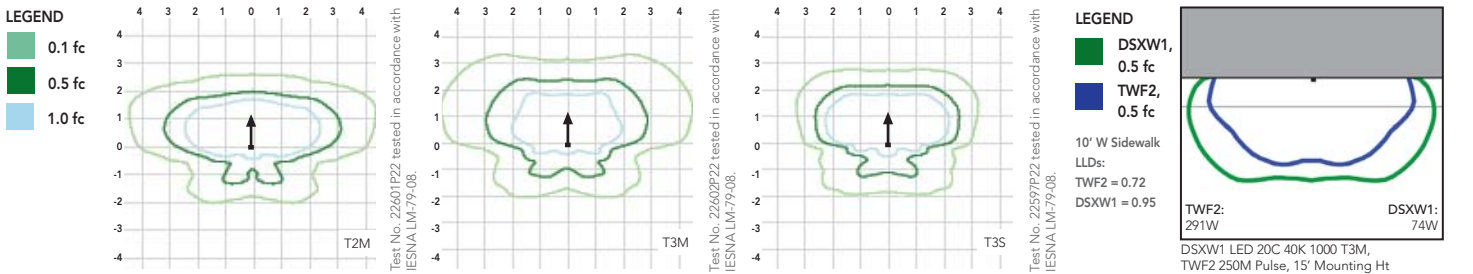

Options and Accessories



T3M (left), ASYDF (right) lenses



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (80 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.






D-Series Size 1 LED Area Luminaire

d#series



Specifications

EPA:	1.01 ft ² (0.09 m ²)
Length:	33" (83.8 cm)
Width:	13" (33.0 cm)
Height:	7-1/2" (19.0 cm)
Weight (max):	27 lbs (12.2 kg)

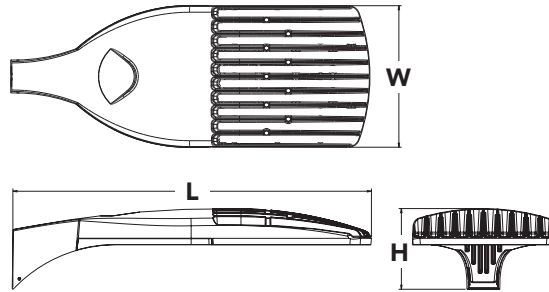

A+ Capable options indicated by this color background.

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL[®] controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM[®] or XPoint[™] Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background¹

To learn more about A+, visit www.acuitybrands.com/aplus.

- See ordering tree for details.
- A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA DDBXD

Series	LEDs	Color temperature	Distribution	Voltage	Mounting
DSX1 LED	Forward optics P1 P4 P7 P2 P5 P8 P3 P6 P9 Rotated optics P10 ¹ P12 ¹ P11 ¹ P13 ¹	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted ²	T1S Type I short T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5S Type V very short T5S Type V short T5M Type V medium T5W Type V wide BLC Backlight control ^{2,3} LCCO Left corner cutoff ^{2,3} RCCO Right corner cutoff ^{2,3}	MVOLT ^{4,5} 120 ⁶ 208 ^{5,6} 240 ^{5,6} 277 ⁶ 347 ^{5,6,7} 480 ^{5,6,7}	Shipped included SPA Square pole mounting RPA Round pole mounting WBA Wall bracket SPUMBA Square pole universal mounting adaptor ⁸ RPUMBA Round pole universal mounting adaptor ⁸ Shipped separately KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁹

Control options	Other options	Finish (required)
Shipped installed NLTAIR2 nLight AIR generation 2 enabled ¹⁰ PER NEMA twist-lock receptacle only (controls ordered separate) ¹¹ PER5 Five-wire receptacle only (controls ordered separate) ^{11,12} PER7 Seven-wire receptacle only (controls ordered separate) ^{11,12} DMG 0-10V dimming extend out back of housing for external control (leads exit fixture) DS Dual switching ^{13,14} PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ^{5,15,16} PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ^{5,15,16} PIRHN Network, Bi-Level motion/ambient sensor ¹⁷ PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ^{5,15,16}	PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ^{5,15,16} BL30 Bi-level switched dimming, 30% ^{5,14,18} BL50 Bi-level switched dimming, 50% ^{5,14,18} PNMTDD3 Part night, dim till dawn ^{5,19} PNMT5D3 Part night, dim 5 hrs ^{5,19} PNMT6D3 Part night, dim 6 hrs ^{5,19} PNMT7D3 Part night, dim 7 hrs ^{5,19} FAO Field adjustable output ²⁰	Shipped installed HS House-side shield ²¹ SF Single fuse (120, 277, 347V) ⁶ DF Double fuse (208, 240, 480V) ⁶ L90 Left rotated optics ¹ R90 Right rotated optics ¹ Shipped separately BS Bird spikes ²² EGS External glare shield ²²
		DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



Ordering Information

Accessories

Ordered and shipped separately.


DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²³
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²³
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²³
DSHORT SBK U	Shorting cap ²³
DSX1HS 30C U	House-side shield for 30 LED unit ²¹
DSX1HS 40C U	House-side shield for 40 LED unit ²¹
DSX1HS 60C U	House-side shield for 60 LED unit ²¹
PUMBA DDBXD U*	Square and round pole universal mounting bracket (specify finish) ²⁴
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ⁴

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES


- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- AMBPC is not available with BLC, LCCO, RCCO or P4, P7, P8, P9 or P13.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Any PIRx with BL30, BL50 or PNMT, is not available with 208V, 240V, 347V, 480V or MVOLT. It is only available in 120V or 277V specified.
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10. Not available with BL30, BL50 or PNMT options.
- Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN.
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM[®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming. Shorting cap included.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits.
- Reference Motion Sensor table on page 3.
- Reference PER table on page 3 to see functionality.
- Must be ordered with NLTAIR2. For more information on nLight Air 2 visit [this link](#).
- Not available with 347V, 480V, PNMT, DS. For PER5 or PER7, see PER Table on page 3. Requires isolated neutral.
- Not available with 347V, 480V, DS, BL30, BL50. For PER5 or PER7, see PER Table on page 3. Separate Dusk to Dawn required.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.

External Glare Shield

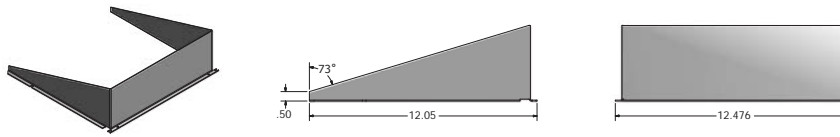

Drilling

HANDHOLE ORIENTATION

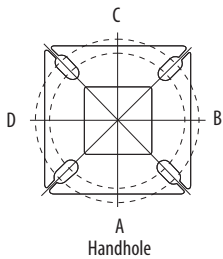

Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)


DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D

Note: Review luminaire spec sheet for specific nomenclature

Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSX SPA	Y	Y	Y	N	-	-	-	-
DSX RPA	Y	Y	N	N	Y	Y	Y	Y
DSX SPUMBA	Y	N	N	N	-	-	-	-
DSX RPUMBA	N	N	N	N	Y	Y	Y	N

*3 fixtures @120 require round pole top/tenon.


Template #8

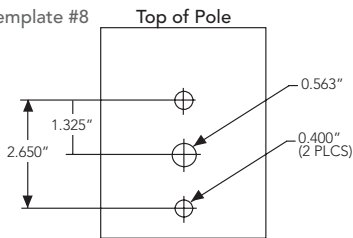

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit [Lithonia Lighting's D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

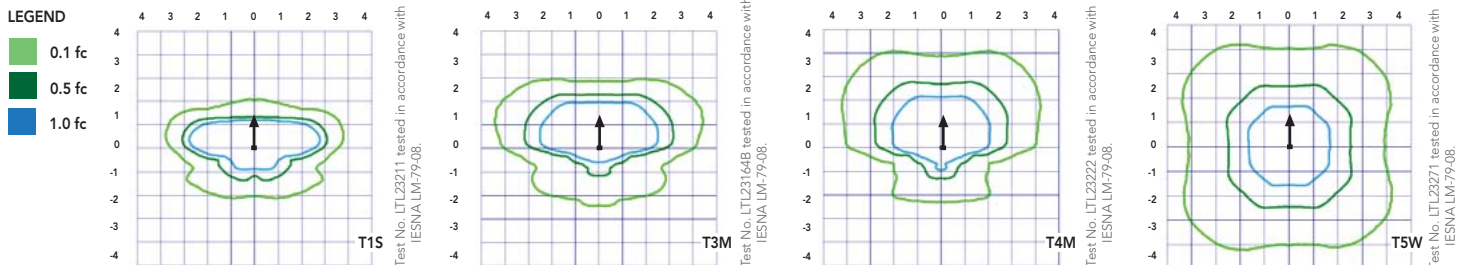

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	100000
Lumen Maintenance Factor	1.00	0.96	0.92	0.85

Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	P6	40	1250	163	1.36	0.78	0.68	0.59	0.47	0.34
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use with Inline Dusk to Dawn or timer.

PER Table

Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)		
		Wire 4/Wire5	Wire 4/Wire5	Wire 4/Wire5	Wire 6/Wire7	
Photocontrol Only (On/Off)	✓	▲	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	✗	✓	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	✗	▲	Wires Capped inside fixture	▲	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	✗	▲	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	✗	▲	Wires Capped inside fixture	✓	Wires Capped inside fixture	Wires Capped inside fixture

✓ Recommended
✗ Will not work
▲ Alternate

*Future-proof means: Ability to change controls in the future.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																												
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
30	530	P1	54W	T1S	6,457	2	0	2	120	6,956	2	0	2	129	7,044	2	0	2	130	3,640	1	0	1	70				
				T2S	6,450	2	0	2	119	6,949	2	0	2	129	7,037	2	0	2	130	3,813	1	0	1	73				
				T2M	6,483	1	0	1	120	6,984	2	0	2	129	7,073	2	0	2	131	3,689	1	0	1	71				
				T3S	6,279	2	0	2	116	6,764	2	0	2	125	6,850	2	0	2	127	3,770	1	0	1	73				
				T3M	6,468	1	0	2	120	6,967	1	0	2	129	7,056	1	0	2	131	3,752	1	0	1	72				
				T4M	6,327	1	0	2	117	6,816	1	0	2	126	6,902	1	0	2	128	3,758	1	0	1	72				
				TFTM	6,464	1	0	2	120	6,963	1	0	2	129	7,051	1	0	2	131	3,701	1	0	1	71				
				TSVS	6,722	2	0	0	124	7,242	3	0	0	134	7,334	3	0	0	136	3,928	2	0	0	76				
				T5S	6,728	2	0	1	125	7,248	2	0	1	134	7,340	2	0	1	136	3,881	2	0	0	75				
				T5M	6,711	3	0	1	124	7,229	3	0	1	134	7,321	3	0	2	136	3,930	2	0	1	76				
				TSW	6,667	3	0	2	123	7,182	3	0	2	133	7,273	3	0	2	135	3,820	3	0	1	73				
				BLC	5,299	1	0	1	98	5,709	1	0	2	106	5,781	1	0	2	107									
				LCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80									
				RCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80									
				30	700	P2	70W	T1S	8,249	2	0	2	118	8,886	2	0	2	127	8,999	2	0	2	129	4,561	1	0	1	67
								T2S	8,240	2	0	2	118	8,877	2	0	2	127	8,989	2	0	2	128	4,777	1	0	1	70
T2M	8,283	2	0					2	118	8,923	2	0	2	127	9,036	2	0	2	129	4,622	1	0	2	68				
T3S	8,021	2	0					2	115	8,641	2	0	2	123	8,751	2	0	2	125	4,724	1	0	1	69				
T3M	8,263	2	0					2	118	8,901	2	0	2	127	9,014	2	0	2	129	4,701	1	0	2	69				
T4M	8,083	2	0					2	115	8,708	2	0	2	124	8,818	2	0	2	126	4,709	1	0	2	69				
TFTM	8,257	2	0					2	118	8,896	2	0	2	127	9,008	2	0	2	129	4,638	1	0	2	68				
TSVS	8,588	3	0					0	123	9,252	3	0	0	132	9,369	3	0	0	134	4,922	2	0	0	72				
T5S	8,595	3	0					1	123	9,259	3	0	1	132	9,376	3	0	1	134	4,863	2	0	0	72				
T5M	8,573	3	0					2	122	9,236	3	0	2	132	9,353	3	0	2	134	4,924	3	0	1	72				
TSW	8,517	3	0					2	122	9,175	4	0	2	131	9,291	4	0	2	133	4,787	3	0	1	70				
BLC	6,770	1	0					2	97	7,293	1	0	2	104	7,386	1	0	2	106									
LCCO	5,038	1	0					2	72	5,427	1	0	2	78	5,496	1	0	2	79									
RCCO	5,038	1	0					2	72	5,427	1	0	2	78	5,496	1	0	2	79									
30	1050	P3	102W					T1S	11,661	2	0	2	114	12,562	3	0	3	123	12,721	3	0	3	125					
								T2S	11,648	2	0	2	114	12,548	3	0	3	123	12,707	3	0	3	125					
				T2M	11,708	2	0	2	115	12,613	2	0	2	124	12,773	2	0	2	125									
				T3S	11,339	2	0	2	111	12,215	3	0	3	120	12,370	3	0	3	121									
				T3M	11,680	2	0	2	115	12,582	2	0	2	123	12,742	2	0	2	125									
				T4M	11,426	2	0	3	112	12,309	2	0	3	121	12,465	2	0	3	122									
				TFTM	11,673	2	0	2	114	12,575	2	0	3	123	12,734	2	0	3	125									
				TSVS	12,140	3	0	1	119	13,078	3	0	1	128	13,244	3	0	1	130									
				T5S	12,150	3	0	1	119	13,089	3	0	1	128	13,254	3	0	1	130									
				T5M	12,119	4	0	2	119	13,056	4	0	2	128	13,221	4	0	2	130									
				TSW	12,040	4	0	3	118	12,970	4	0	3	127	13,134	4	0	3	129									
				BLC	9,570	1	0	2	94	10,310	1	0	2	101	10,440	1	0	2	102									
				LCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76									
				RCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76									
				30	1250	P4	125W	T1S	13,435	3	0	3	107	14,473	3	0	3	116	14,657	3	0	3	117					
								T2S	13,421	3	0	3	107	14,458	3	0	3	116	14,641	3	0	3	117					
T2M	13,490	2	0					2	108	14,532	3	0	3	116	14,716	3	0	3	118									
T3S	13,064	3	0					3	105	14,074	3	0	3	113	14,252	3	0	3	114									
T3M	13,457	2	0					2	108	14,497	2	0	2	116	14,681	2	0	2	117									
T4M	13,165	2	0					3	105	14,182	2	0	3	113	14,362	2	0	3	115									
TFTM	13,449	2	0					3	108	14,488	2	0	3	116	14,672	2	0	3	117									
TSVS	13,987	4	0					1	112	15,068	4	0	1	121	15,259	4	0	1	122									
T5S	13,999	3	0					1	112	15,080	3	0	1	121	15,271	3	0	1	122									
T5M	13,963	4	0					2	112	15,042	4	0	2	120	15,233	4	0	2	122									
TSW	13,872	4	0					3	111	14,944	4	0	3	120	15,133	4	0	3	121									
BLC	11,027	1	0					2	88	11,879	1	0	2	95	12,029	1	0	2	96									
LCCO	8,205	1	0					3	66	8,839	1	0	3	71	8,951	1	0	3	72									
RCCO	8,205	1	0					3	66	8,839	1	0	3	71	8,951	1	0	3	72									
30	1400	P5	138W					T1S	14,679	3	0	3	106	15,814	3	0	3	115	16,014	3	0	3	116					
								T2S	14,664	3	0	3	106	15,797	3	0	3	114	15,997	3	0	3	116					
				T2M	14,739	3	0	3	107	15,878	3	0	3	115	16,079	3	0	3	117									
				T3S	14,274	3	0	3	103	15,377	3	0	3	111	15,572	3	0	3	113									
				T3M	14,704	2	0	3	107	15,840	3	0	3	115	16,040	3	0	3	116									
				T4M	14,384	2	0	3	104	15,496	3	0	3	112	15,692	3	0	3	114									
				TFTM	14,695	2	0	3	106	15,830	3	0	3	115	16,030	3	0	3	116									
				TSVS	15,283	4	0	1	111	16,464	4	0	1	119	16,672	4	0	1	121									
				T5S	15,295	3	0	1	111	16,477	4	0	1	119	16,686	4	0	1	121									
				T5M	15,257	4	0	2	111	16,435	4	0	2	119	16,644	4	0	2	121									
				TSW	15,157	4	0	3	110	16,328	4	0	3	118	16,534	4	0	3	120									
				BLC	12,048	1	0	2	87	12,979	1	0	2	94	13,143	1	0	2	95									
				LCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1												

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																											
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)							
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lu-mens	B	U	G	LPW			
40	1250	P6	163W	T1S	17,654	3	0	3	108	19,018	3	0	3	117	19,259	3	0	3	118								
				T2S	17,635	3	0	3	108	18,998	3	0	3	117	19,238	3	0	3	118								
				T2M	17,726	3	0	3	109	19,096	3	0	3	117	19,337	3	0	3	119								
				T3S	17,167	3	0	3	105	18,493	3	0	3	113	18,727	3	0	3	115								
				T3M	17,683	3	0	3	108	19,049	3	0	3	117	19,290	3	0	3	118								
				T4M	17,299	3	0	3	106	18,635	3	0	4	114	18,871	3	0	4	116								
				TFTM	17,672	3	0	3	108	19,038	3	0	4	117	19,279	3	0	4	118								
				TSVS	18,379	4	0	1	113	19,800	4	0	1	121	20,050	4	0	1	123								
				T5S	18,394	4	0	2	113	19,816	4	0	2	122	20,066	4	0	2	123								
				T5M	18,348	4	0	2	113	19,766	4	0	2	121	20,016	4	0	2	123								
				T5W	18,228	5	0	3	112	19,636	5	0	3	120	19,885	5	0	3	122								
				BLC	14,489	2	0	2	89	15,609	2	0	3	96	15,806	2	0	3	97								
				LCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72								
				RCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72								
				40	1400	P7	183W	T1S	19,227	3	0	3	105	20,712	3	0	3	113	20,975	3	0	3	115				
T2S	19,206	3	0					3	105	20,690	3	0	3	113	20,952	3	0	3	114								
T2M	19,305	3	0					3	105	20,797	3	0	3	114	21,060	3	0	3	115								
T3S	18,696	3	0					3	102	20,141	3	0	3	110	20,396	3	0	4	111								
T3M	19,258	3	0					3	105	20,746	3	0	3	113	21,009	3	0	3	115								
T4M	18,840	3	0					4	103	20,296	3	0	4	111	20,553	3	0	4	112								
TFTM	19,246	3	0					4	105	20,734	3	0	4	113	20,996	3	0	4	115								
TSVS	20,017	4	0					1	109	21,564	4	0	1	118	21,837	4	0	1	119								
T5S	20,033	4	0					2	109	21,581	4	0	2	118	21,854	4	0	2	119								
T5M	19,983	4	0					2	109	21,527	5	0	3	118	21,799	5	0	3	119								
T5W	19,852	5	0					3	108	21,386	5	0	3	117	21,656	5	0	3	118								
BLC	15,780	2	0					3	86	16,999	2	0	3	93	17,214	2	0	3	94								
LCCO	11,742	2	0					3	64	12,649	2	0	3	69	12,809	2	0	3	70								
RCCO	11,742	2	0					3	64	12,649	2	0	3	69	12,809	2	0	3	70								
60	1050	P8	207W					T1S	22,490	3	0	3	109	24,228	3	0	3	117	24,535	3	0	3	119				
				T2S	22,466	3	0	4	109	24,202	3	0	4	117	24,509	3	0	4	118								
				T2M	22,582	3	0	3	109	24,327	3	0	3	118	24,635	3	0	3	119								
				T3S	21,870	3	0	4	106	23,560	3	0	4	114	23,858	3	0	4	115								
				T3M	22,527	3	0	4	109	24,268	3	0	4	117	24,575	3	0	4	119								
				T4M	22,038	3	0	4	106	23,741	3	0	4	115	24,041	3	0	4	116								
				TFTM	22,513	3	0	4	109	24,253	3	0	4	117	24,560	3	0	4	119								
				TSVS	23,415	5	0	1	113	25,224	5	0	1	122	25,543	5	0	1	123								
				T5S	23,434	4	0	2	113	25,244	4	0	2	122	25,564	4	0	2	123								
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123								
				T5W	23,221	5	0	4	112	25,016	5	0	4	121	25,332	5	0	4	122								
				BLC	18,458	2	0	3	89	19,885	2	0	3	96	20,136	2	0	3	97								
				LCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72								
				RCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72								
				60	1250	P9	241W	T1S	25,575	3	0	3	106	27,551	3	0	3	114	27,900	3	0	3	116				
T2S	25,548	3	0					4	106	27,522	3	0	4	114	27,871	3	0	4	116								
T2M	25,680	3	0					3	107	27,664	3	0	3	115	28,014	3	0	3	116								
T3S	24,870	3	0					4	103	26,791	3	0	4	111	27,130	3	0	4	113								
T3M	25,617	3	0					4	106	27,597	3	0	4	115	27,946	3	0	4	116								
T4M	25,061	3	0					4	104	26,997	3	0	4	112	27,339	3	0	4	113								
TFTM	25,602	3	0					4	106	27,580	3	0	4	114	27,929	3	0	4	116								
TSVS	26,626	5	0					1	110	28,684	5	0	1	119	29,047	5	0	1	121								
T5S	26,648	4	0					2	111	28,707	5	0	2	119	29,070	5	0	2	121								
T5M	26,581	5	0					3	110	28,635	5	0	3	119	28,997	5	0	3	120								
T5W	26,406	5	0					4	110	28,447	5	0	4	118	28,807	5	0	4	120								
BLC	20,990	2	0					3	87	22,612	2	0	3	94	22,898	2	0	3	95								
LCCO	15,619	2	0					4	65	16,825	2	0	4	70	17,038	2	0	4	71								
									15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71				

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																								
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
					60	530	P10	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134
				T2S	12,967	4	0	4	122	13,969	4	0	4	132	14,146	4	0	4	133	7,507	2	0	2	76
				T2M	13,201	3	0	3	125	14,221	3	0	3	134	14,401	3	0	3	136	7,263	2	0	2	73
				T3S	12,766	4	0	4	120	13,752	4	0	4	130	13,926	4	0	4	131	7,424	2	0	2	75
				T3M	13,193	4	0	4	124	14,213	4	0	4	134	14,393	4	0	4	136	7,387	2	0	2	75
				T4M	12,944	4	0	4	122	13,945	4	0	4	132	14,121	4	0	4	133	7,400	2	0	2	75
				TFTM	13,279	4	0	4	125	14,305	4	0	4	135	14,486	4	0	4	137	7,288	1	0	2	74
				TSVS	13,372	3	0	1	126	14,405	4	0	1	136	14,588	4	0	1	138	7,734	3	0	1	78
				T5S	13,260	3	0	1	125	14,284	3	0	1	135	14,465	3	0	1	136	7,641	3	0	0	77
				T5M	13,256	4	0	2	125	14,281	4	0	2	135	14,462	4	0	2	136	7,737	3	0	2	78
				T5W	13,137	4	0	3	124	14,153	4	0	3	134	14,332	4	0	3	135	7,522	3	0	2	76
				BLC	10,906	3	0	3	103	11,749	3	0	3	111	11,898	3	0	3	112					
				LCCO	7,789	1	0	3	73	8,391	1	0	3	79	8,497	1	0	3	80					
				RCCO	7,779	4	0	4	73	8,380	4	0	4	79	8,486	4	0	4	80					
60	700	P11	137W	T1S	16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132	8,952	2	0	2	68
				T2S	16,461	4	0	4	120	17,733	4	0	4	129	17,957	4	0	4	131	9,377	2	0	2	72
				T2M	16,758	4	0	4	122	18,053	4	0	4	132	18,281	4	0	4	133	9,072	2	0	2	69
				T3S	16,205	4	0	4	118	17,457	4	0	4	127	17,678	4	0	4	129	9,273	2	0	2	71
				T3M	16,748	4	0	4	122	18,042	4	0	4	132	18,271	4	0	4	133	9,227	2	0	2	70
				T4M	16,432	4	0	4	120	17,702	4	0	4	129	17,926	4	0	4	131	9,243	2	0	2	71
				TFTM	16,857	4	0	4	123	18,159	4	0	4	133	18,389	4	0	4	134	9,103	2	0	2	69
				TSVS	16,975	4	0	1	124	18,287	4	0	1	133	18,518	4	0	1	135	9,661	3	0	1	74
				T5S	16,832	4	0	1	123	18,133	4	0	2	132	18,362	4	0	2	134	9,544	3	0	1	73
				T5M	16,828	4	0	2	123	18,128	4	0	2	132	18,358	4	0	2	134	9,665	3	0	2	74
				T5W	16,677	4	0	3	122	17,966	5	0	3	131	18,193	5	0	3	133	9,395	4	0	2	72
				BLC	13,845	3	0	3	101	14,915	3	0	3	109	15,103	3	0	3	110					
				LCCO	9,888	1	0	3	72	10,652	2	0	3	78	10,787	2	0	3	79					
				RCCO	9,875	4	0	4	72	10,638	4	0	4	78	10,773	4	0	4	79					
60	1050	P12	207W	T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121					
				T2S	22,864	4	0	4	110	24,631	5	0	5	119	24,943	5	0	5	120					
				T2M	23,277	4	0	4	112	25,075	4	0	4	121	25,393	4	0	4	123					
				T3S	22,509	4	0	4	109	24,248	5	0	5	117	24,555	5	0	5	119					
				T3M	23,263	4	0	4	112	25,061	4	0	4	121	25,378	4	0	4	123					
				T4M	22,824	5	0	5	110	24,588	5	0	5	119	24,899	5	0	5	120					
				TFTM	23,414	5	0	5	113	25,223	5	0	5	122	25,543	5	0	5	123					
				TSVS	23,579	5	0	1	114	25,401	5	0	1	123	25,722	5	0	1	124					
				T5S	23,380	4	0	2	113	25,187	4	0	2	122	25,506	4	0	2	123					
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123					
				T5W	23,165	5	0	4	112	24,955	5	0	4	121	25,271	5	0	4	122					
				BLC	19,231	4	0	4	93	20,717	4	0	4	100	20,979	4	0	4	101					
				LCCO	13,734	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72					
				RCCO	13,716	4	0	4	66	14,776	4	0	4	71	14,963	4	0	4	72					
60	1250	P13	231W	T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120					
				T2S	25,254	5	0	5	109	27,205	5	0	5	118	27,550	5	0	5	119					
				T2M	25,710	4	0	4	111	27,696	4	0	4	120	28,047	4	0	4	121					
				T3S	24,862	5	0	5	108	26,783	5	0	5	116	27,122	5	0	5	117					
				T3M	25,695	5	0	5	111	27,680	5	0	5	120	28,031	5	0	5	121					
				T4M	25,210	5	0	5	109	27,158	5	0	5	118	27,502	5	0	5	119					
				TFTM	25,861	5	0	5	112	27,860	5	0	5	121	28,212	5	0	5	122					
				TSVS	26,043	5	0	1	113	28,056	5	0	1	121	28,411	5	0	1	123					
				T5S	25,824	4	0	2	112	27,819	5	0	2	120	28,172	5	0	2	122					
				T5M	25,818	5	0	3	112	27,813	5	0	3	120	28,165	5	0	3	122					
				T5W	25,586	5	0	4	111	27,563	5	0	4	119	27,912	5	0	4	121					
				BLC	21,241	4	0	4	92	22,882	4	0	4	99	23,172	4	0	4	100					
				LCCO	15,170	2	0	4	66	16,342	2	0	4	71	16,549	2	0	4	72					
					15,150	5	0	5	66	16,321	5	0	5	71	16,527	5	0	5	72					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1

electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



