


EXTERIOR LIGHTING ZONE LEVELS			
ZONE	AVERAGE	MAX/MIN	MIN
PARKING LOT	2.0FC	21.7'1	0.3FC
TRESPASS	0.0FC	N/A	0.0FC

### LIGHTING FIXTURE SCHEDULE

TYPE	MANUFACTURER NUMBER AND DETAILS	VOLTAGE	MOUNTING	TYPE	LED QUANTITY	DESCRIPTION
LP-A	LITHONIA NO. 180KLEDP1-1AK-228-228-PA-1S-1S-ED-80	228	POLE	LED	1	SINGLE HEAD POLE MOUNTED LED LUMINAIRE, TYPE 2 DISTRIBUTION WITH HOUSE SIDE 1800 LUMENS SHIELDED, MOUNTED ON 22" OF POLE WITH 2" BASE ROUND STEEL POLE, WIND RATING 140 WATTS
LP-B	LITHONIA NO. 180KLEDP1-1AK-448-228-PA-1S-1S-ED-80	228	POLE	LED	1	SINGLE HEAD POLE MOUNTED LED LUMINAIRE, TYPE 4 DISTRIBUTION WITH 1800 LUMENS MOUNTED ON 22" OF POLE WITH 2" BASE ROUND STEEL POLE, WIND RATING 140 WATTS
LWT	LITHONIA NO. W5TLED-P1-1AK-140V-1E-7W	120	WALL	LED	1	1900 LUMENS 1'x1' PROVIDE WITH EMERGENCY BATTERY

- NOTES:**
1. ALL DIMENSIONS SHALL BE TO FACE UNLESS OTHERWISE NOTED.
  2. SEE LIGHT FIXTURE SCHEDULE FOR LIGHTING CONFIGURATION.
  3. ALL DIMENSIONS SHALL BE COORDINATED AND COMPLY WITH GEOTECHNICAL REPORT.
  4. ALL DIMENSIONS SHALL BE TO FACE UNLESS OTHERWISE NOTED.
  5. POLE BASE SHALL BE IN FULL CONTACT WITH THE CONCRETE BASE.
  6. PAINT POLE BASES YELLOW BEFORE INSTALLING POLES.

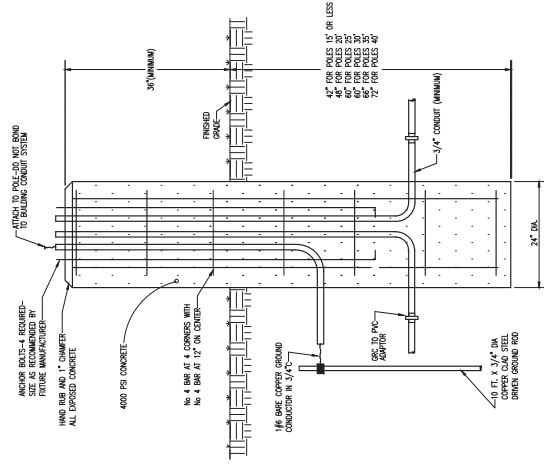

1. DETAIL - TYPICAL ELEVATED CONCRETE POLE BASE  
POLE TYPES 'PLA' 'PLB'

NO SCALE



ISSUE FOR CONSTRUCTION  
11.22.2017

NO.	DATE	DESCRIPTION

PAWMS PET RESORT  
3118 PINE TREE DRIVE  
VESTAVIA HILLS, AL 35242

BLACK DESIGN ARCHITECTURE  
12121 1ST AVENUE NORTH  
BIRMINGHAM, AL 35203  
205-998-0022  
EMAIL: INFO@BLACKDESIGNARCH.COM

DATE ISSUED	BY	SCALE
11-22-17		

SHEET NUMBER  
**EC1.1**

**WST LED Architectural Wall Sconce**

**Specifications:**

- Material: Die Cast Aluminum
- Finish: Matte Black
- Height: 2 1/2"
- Width: 3 1/2"
- Weight: 1.2 lbs
- Optimal Back Box (PBR8): 3 1/2" x 2 1/2" x 1 1/2"
- Back Box Depth: 1 1/2"
- Back Box Height: 2 1/2"
- Back Box Width: 3 1/2"

**Optimal Back Box (PBR8):**

**Notes:**

- 1. This sconce is die cast aluminum with a matte black finish.
- 2. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 3. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 4. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 5. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.

**Emergency Battery Operation:**

The sconce is designed to operate on a 12VDC emergency battery. The battery is housed in a separate enclosure and is connected to the sconce via a 12VDC power cable. The sconce will continue to operate for up to 24 hours on a fully charged battery.

**WST LED Architectural Wall Sconce**

**Specifications:**

- Material: Die Cast Aluminum
- Finish: Matte Black
- Height: 2 1/2"
- Width: 3 1/2"
- Weight: 1.2 lbs
- Optimal Back Box (PBR8): 3 1/2" x 2 1/2" x 1 1/2"
- Back Box Depth: 1 1/2"
- Back Box Height: 2 1/2"
- Back Box Width: 3 1/2"

**Optimal Back Box (PBR8):**

**Notes:**

- 1. This sconce is die cast aluminum with a matte black finish.
- 2. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 3. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 4. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 5. The sconce is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.

**Emergency Battery Operation:**

The sconce is designed to operate on a 12VDC emergency battery. The battery is housed in a separate enclosure and is connected to the sconce via a 12VDC power cable. The sconce will continue to operate for up to 24 hours on a fully charged battery.

**D-Series Size 2 LED Area Luminaire**

**Specifications:**

- Material: Die Cast Aluminum
- Finish: Matte Black
- Height: 12"
- Width: 12"
- Weight: 15 lbs
- Optimal Back Box (PBR8): 12" x 12" x 4"
- Back Box Depth: 4"
- Back Box Height: 12"
- Back Box Width: 12"

**Optimal Back Box (PBR8):**

**Notes:**

- 1. This luminaire is die cast aluminum with a matte black finish.
- 2. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 3. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 4. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 5. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.

**Emergency Battery Operation:**

The luminaire is designed to operate on a 12VDC emergency battery. The battery is housed in a separate enclosure and is connected to the luminaire via a 12VDC power cable. The luminaire will continue to operate for up to 24 hours on a fully charged battery.

**D-Series Size 2 LED Area Luminaire**

**Specifications:**

- Material: Die Cast Aluminum
- Finish: Matte Black
- Height: 12"
- Width: 12"
- Weight: 15 lbs
- Optimal Back Box (PBR8): 12" x 12" x 4"
- Back Box Depth: 4"
- Back Box Height: 12"
- Back Box Width: 12"

**Optimal Back Box (PBR8):**

**Notes:**

- 1. This luminaire is die cast aluminum with a matte black finish.
- 2. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 3. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 4. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.
- 5. The luminaire is designed to be mounted on a wall with a minimum clearance of 1/2" from the wall.

**Emergency Battery Operation:**

The luminaire is designed to operate on a 12VDC emergency battery. The battery is housed in a separate enclosure and is connected to the luminaire via a 12VDC power cable. The luminaire will continue to operate for up to 24 hours on a fully charged battery.



Gunn & Associates, P.C.  
Consulting Engineers  
1100 Highway 11  
Auburn, AL 36809  
Tel: 334.251.1772  
Fax: 334.251.1773  
www.gunn.com